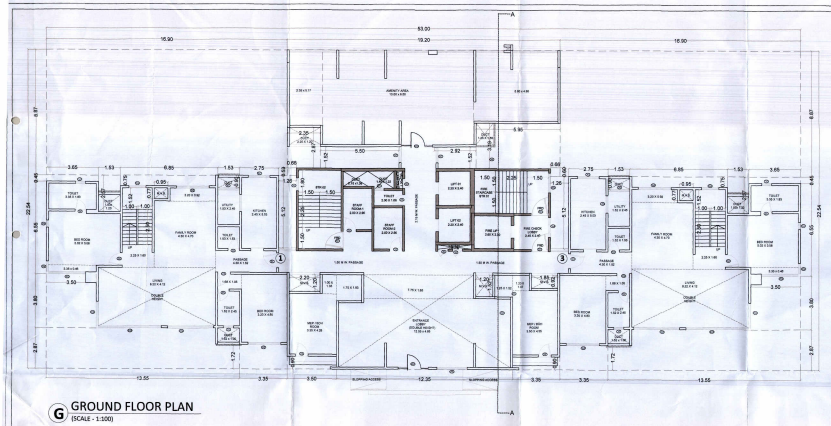

G GROUND FLOOR PLAN
(SCALE - 1:100)

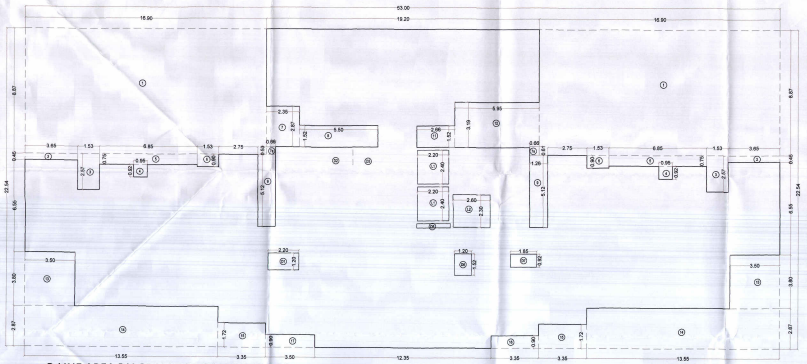

G P-LINE AREA DIAGRAM FOR GROUND FLOOR
(SCALE - 1:100)

G	BUILT-UP AREA CALCULATION GROUND FLOOR							
AREA OF THE BLOCK								
53.00	X	22.54	X	1	=	1194.62	SQMT	
		TOTAL AREA			=	1194.62	SQMT	A
STANDARD DEDUCTION								
1	16.90	X	8.87	X	2	=	299.81	SQMT
2	3.65	X	0.45	X	2	=	3.29	SQMT
3	1.53	X	2.57	X	2	=	7.86	SQMT
4	0.95	X	0.92	X	2	=	1.75	SQMT
5	6.85	X	0.75	X	2	=	10.28	SQMT
6	1.53	X	0.90	X	2	=	2.75	SQMT
7	2.35	X	2.87	X	1	=	6.74	SQMT
7a	0.66	X	0.53	X	2	=	0.70	SQMT
8	5.50	X	1.52	X	1	=	8.36	SQMT
9	1.26	X	5.13	X	2	=	12.90	SQMT
11	2.66	X	1.52	X	1	=	4.04	SQMT
12	5.95	X	3.19	X	1	=	18.98	SQMT
13	3.50	X	3.80	X	2	=	26.60	SQMT
14	13.55	X	2.87	X	2	=	77.78	SQMT
15	3.35	X	1.73	X	2	=	11.52	SQMT
16	3.35	X	0.90	X	1	=	3.02	SQMT
17	3.50	X	0.90	X	1	=	3.15	SQMT
D1	2.20	X	1.20	X	1	=	2.64	SQMT
D2	2.15	X	1.07	X	1	=	2.30	SQMT
D3	2.00	X	1.22	X	1	=	2.44	SQMT
D5	2.35	X	0.35	X	1	=	0.71	SQMT
D6	1.20	X	1.52	X	1	=	1.82	SQMT
D7	1.85	X	0.92	X	1	=	1.70	SQMT
L1	2.20	X	2.40	X	2	=	10.56	SQMT
L2	2.40	X	2.30	X	1	=	5.98	SQMT
TOTAL DEDUCTION AREA						=	527.22	SQMT	B
NET BUILT-UP AREA [A - B]						=	667.40	SQMT	C

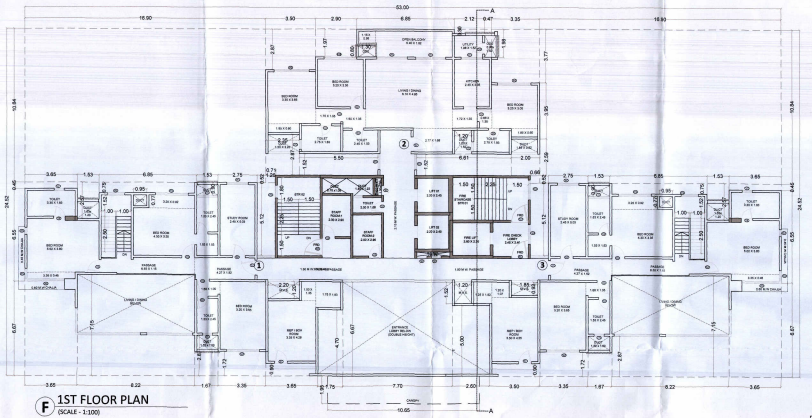

F 1ST FLOOR PLAN
(SCALE - 1:100)

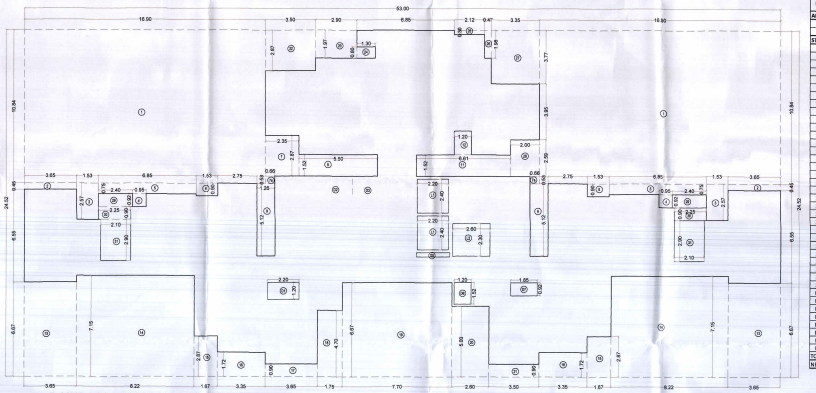

F P-LINE AREA DIAGRAM FOR 1ST FLOOR
(SCALE - 1:100)

F2	BUILT-UP AREA CALCULATION FIRST FLOOR							
AREA OF THE BLOCK								
53.00	X	24.52	X	1	=	1299.56	SQMT	
		TOTAL AREA			=	1299.56	SQMT	A
STANDARD DEDUCTION								
1	16.90	X	10.84	X	2	=	366.39	SQMT.
2	3.65	X	0.45	X	2	=	3.29	SQMT.
3	1.53	X	2.57	X	2	=	7.86	SQMT.
4	0.95	X	0.92	X	2	=	1.75	SQMT.
5	6.85	X	0.75	X	2	=	10.28	SQMT.
6	1.53	X	0.90	X	2	=	2.75	SQMT.
7	2.35	X	2.87	X	1	=	6.74	SQMT.
7a	0.66	X	0.53	X	2	=	0.70	SQMT.
8	5.50	X	1.52	X	1	=	8.36	SQMT.
9	1.26	X	5.12	X	2	=	12.90	SQMT.
11	6.61	X	1.52	X	1	=	10.05	SQMT.
12	1.20	X	1.67	X	1	=	2.00	SQMT.
13	3.60	X	6.67	X	2	=	48.06	SQMT.
14	8.22	X	7.15	X	2	=	117.55	SQMT.
15	1.67	X	2.87	X	2	=	9.59	SQMT.
16	3.35	X	1.73	X	2	=	11.58	SQMT.
17	3.65	X	0.90	X	1	=	3.29	SQMT.
18	1.75	X	4.70	X	1	=	8.23	SQMT.
19	7.70	X	6.67	X	1	=	51.36	SQMT.
20	2.60	X	5.00	X	3	=	19.50	SQMT.
21	3.50	X	0.90	X	1	=	3.15	SQMT.
22	3.50	X	2.87	X	1	=	10.05	SQMT.
23	2.90	X	1.97	X	3	=	5.73	SQMT.
24	1.30	X	0.80	X	1	=	1.04	SQMT.
25	2.22	X	0.30	X	1	=	0.66	SQMT.
26	0.47	X	1.98	X	3	=	0.93	SQMT.
27	3.30	X	3.77	X	1	=	12.43	SQMT.
28	2.00	X	2.59	X	1	=	5.18	SQMT.
29	2.40	X	0.92	X	2	=	4.42	SQMT.
30	2.25	X	0.90	X	3	=	4.05	SQMT.
31	2.10	X	2.90	X	2	=	12.18	SQMT.
D1	2.20	X	1.20	X	1	=	2.64	SQMT.
D2	2.15	X	1.07	X	1	=	2.30	SQMT.
D3	2.00	X	1.22	X	1	=	2.44	SQMT.
D5	2.35	X	0.30	X	1	=	0.71	SQMT.
D6	1.20	X	1.52	X	1	=	1.82	SQMT.
D7	1.85	X	0.92	X	1	=	1.70	SQMT.
L1	2.20	X	2.40	X	2	=	10.56	SQMT.
L2	2.40	X	2.30	X	1	=	5.98	SQMT.
TOTAL DEDUCTION AREA						=	783.96	SQMT.	B
NET BUILT-UP AREA [A - B]						=	515.60	SQMT.	C



CARPET AREA FOR FLAT NO 1 & 3 (GROUND)
(SCALE - 1:100)



CARPET AREA FOR FLAT NO 1 & 3 (1ST FLR)
(SCALE - 1:100)

CARPET AREA STATMENT FOR DUPLEX FLAT NO.							
GROUND FLOOR							
1	3.35	x	1.53	x	1	=	5.13 SQMT
2	1.82	x	4.27	x	1	=	7.77 SQMT
3	6.55	x	6.82	x	1	=	44.68 SQMT
4	4.27	x	3.82	x	1	=	16.31 SQMT
5	0.15	x	1.05	x	1	=	0.16 SQMT
6	12.50	x	3.82	x	1	=	47.75 SQMT
7	0.75	x	2.93	x	1	=	2.19 SQMT
8	3.20	x	1.53	x	1	=	4.90 SQMT
TOTAL AREA						=	128.78 SQMT
FIRST FLOOR							
1	3.35	x	5.90	x	1	=	19.80 SQMT
2	1.82	x	5.90	x	1	=	9.90 SQMT
3	6.55	x	6.82	x	1	=	44.68 SQMT
4	4.27	x	3.82	x	1	=	16.31 SQMT
5	0.15	x	1.05	x	1	=	0.16 SQMT
6	12.50	x	3.82	x	1	=	47.75 SQMT
7	0.75	x	2.93	x	1	=	2.19 SQMT
8	3.20	x	1.53	x	1	=	4.90 SQMT
TOTAL AREA						=	114.46 SQMT
TOTAL CARPET AREA						=	243.15 SQMT

SCHEDULE OF DOORS		
NAME	SIZE	TYPE OF DOOR
MD	1200 x 2250	DOUBLE LEAF DOOR
SD1	1050 x 2250	SLIDE DOOR
SD2	1050 x 2250	WOODEN FRAME WITH ENGINEERED OPENABLE DOOR
SD3	900 x 2250	SLIDE DOOR
SD4	900 x 2250	WOODEN FRAME WITH ENGINEERED OPENABLE DOOR
FD	1050 x 2250	FIRE RATED DOOR SINGLE SHUTTER OPENABLE DOOR
FD1	1050 x 2250	
FD2	1050 x 2250	FIRE RATED DOOR SINGLE SHUTTER OPENABLE DOOR
SD	1050 x 2250	
TD	1050 x 2250	
TD1	1050 x 2250	FIRE RATED DOOR SINGLE SHUTTER OPENABLE DOOR
TD2	1050 x 2250	
TD3	1050 x 2250	
TD4	1050 x 2250	
TD5	1050 x 2250	
TD6	1050 x 2250	