PROFORMA -B

05 / 06

CONTENTS OF SHEET


WING - A
TYPICAL & REFUGE FLOOR PLAN OF WING-A, LINE AREA DIAGRAM & CALCULATION, RERA CARPET & REFUGE AREA STATEMENT

STAMP AND DATE OF APPROVAL OF PLAN


PLANS APPROVED (SET OF DRAWINGS)
WHICH ARE TO BE READ ALONG WITH
COMMENCEMENT CERTIFICATE / AMENDED
COMMENCEMENT CERTIFICATE ISSUED ABOVE
PLINTH LEVEL, BEARING
NOTICE No. MMRDA/CC/NA-3146/ho/1447/2021
DATED 18 AUG 2021
AND THE CONDITIONS MENTIONED THEREIN.

Planning Authority
Town & Country Planning Division
MMRDA

STAMP AND DATE OF RECEIPT OF PLAN

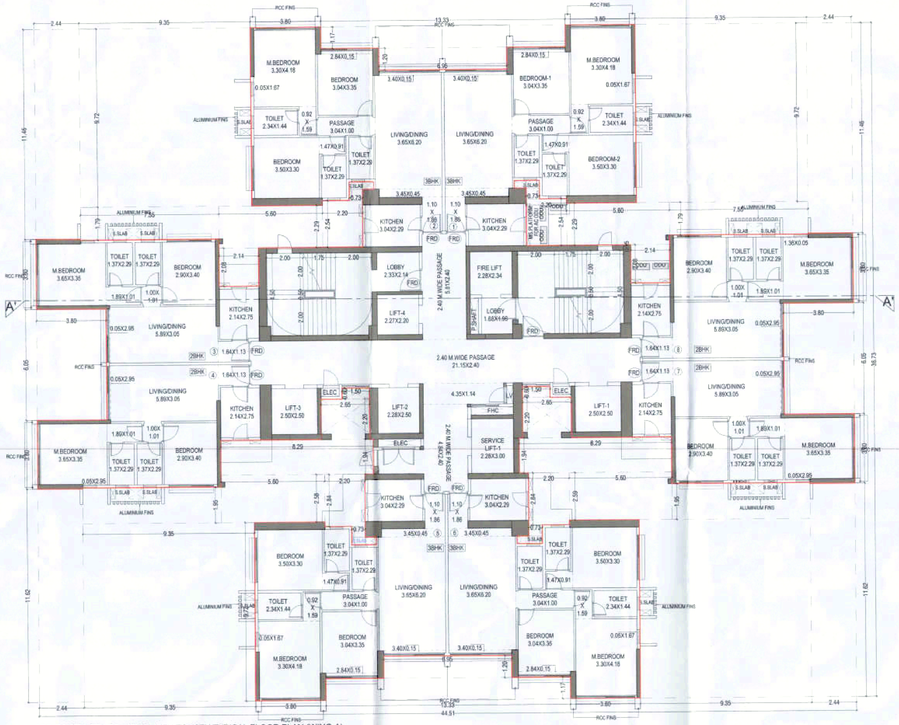


3RD TO 6TH, 8TH TO 13TH & 15TH TO 19TH TYPICAL FLOOR PLAN (WING-A)
SCALE- 1:100

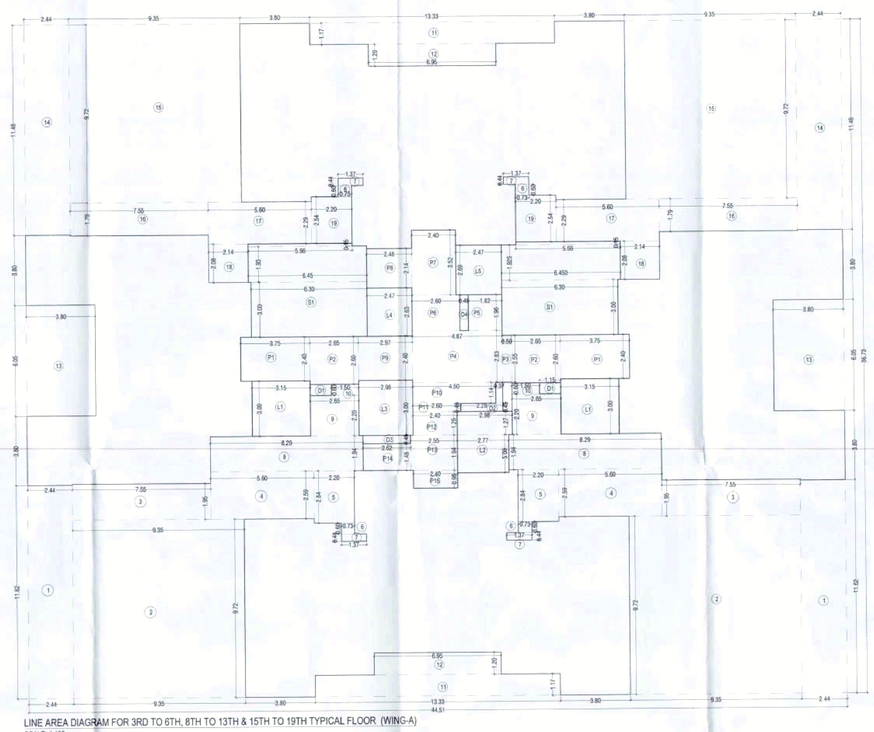

LINE AREA DIAGRAM FOR 3RD TO 6TH, 8TH TO 13TH & 15TH TO 19TH TYPICAL FLOOR (WING-A)
SCALE- 1:100

BUILT UP AREA CALCULATION FOR WING - A
3RD TO 6TH, 8TH TO 13TH & 15TH TO 19TH TYPICAL FLOOR


ADDITION (X)								
A	44.51	X	36.73	X 1.00	X 1	=	1634.85	SQ.MT
TOTAL						=	**1634.85**	**SQ.MT**
STANDARD DEDUCTION (Y1)								
1	2.44	X	11.62	X 1.00	X 2	=	56.71	SQ.MT
2	9.35	X	9.72	X 1.00	X 2	=	181.76	SQ.MT
3	7.55	X	1.95	X 1.00	X 2	=	29.45	SQ.MT
4	5.60	X	2.59	X 1.00	X 2	=	29.01	SQ.MT
5	2.20	X	2.84	X 1.00	X 2	=	12.50	SQ.MT
6	0.73	X	0.60	X 1.00	X 4	=	1.75	SQ.MT
7	1.37	X	0.41	X 1.00	X 4	=	2.25	SQ.MT
8	8.29	X	1.94	X 1.00	X 2	=	32.17	SQ.MT
9	2.65	X	2.20	X 1.00	X 2	=	11.66	SQ.MT
10	1.50	X	0.60	X 1.00	X 2	=	1.80	SQ.MT
11	13.33	X	1.17	X 1.00	X 2	=	31.19	SQ.MT
12	6.95	X	1.20	X 1.00	X 2	=	16.68	SQ.MT
13	3.80	X	6.05	X 1.00	X 2	=	45.98	SQ.MT
14	2.44	X	11.46	X 1.00	X 2	=	55.92	SQ.MT
15	9.35	X	9.72	X 1.00	X 2	=	181.76	SQ.MT
16	7.55	X	1.79	X 1.00	X 2	=	27.03	SQ.MT
17	5.60	X	2.29	X 1.00	X 2	=	25.65	SQ.MT
18	2.14	X	2.08	X 1.00	X 2	=	8.90	SQ.MT
19	2.20	X	2.54	X 1.00	X 2	=	11.18	SQ.MT
TOTAL						=	**783.34**	**SQ.MT**
STAIRCASE,LIFT & LOBBY DEDUCTION (Y2)								
ST	8.30	X	3.00	X 1.00	X 2	=	37.80	SQ.MT
"	6.45	X	1.93	X 1.00	X 2	=	24.83	SQ.MT
"	5.66	X	0.15	X 1.00	X 2	=	1.70	SQ.MT
L1	3.15	X	3.00	X 1.00	X 2	=	18.90	SQ.MT
L2	2.77	X	1.94	X 1.00	X 1	=	5.37	SQ.MT
"	2.98	X	1.27	X 1.00	X 1	=	3.78	SQ.MT
L3	2.98	X	3.00	X 1.00	X 1	=	8.94	SQ.MT
L4	2.47	X	2.63	X 1.00	X 1	=	6.50	SQ.MT
L5	2.47	X	2.64	X 1.00	X 1	=	6.52	SQ.MT
P1	3.75	X	2.40	X 1.00	X 2	=	18.00	SQ.MT
P2	2.65	X	2.60	X 1.00	X 2	=	13.78	SQ.MT
P3	0.50	X	2.55	X 1.00	X 1	=	1.28	SQ.MT
P4	4.87	X	2.63	X 1.00	X 1	=	13.78	SQ.MT
P5	1.82	X	1.96	X 1.00	X 1	=	3.57	SQ.MT
P6	2.60	X	1.96	X 1.00	X 1	=	5.10	SQ.MT
P7	2.40	X	3.52	X 1.00	X 1	=	8.45	SQ.MT
P8	2.48	X	2.14	X 1.00	X 1	=	5.31	SQ.MT
P9	2.97	X	2.40	X 1.00	X 1	=	7.13	SQ.MT
P10	4.50	X	1.14	X 1.00	X 1	=	5.13	SQ.MT
P11	2.60	X	0.45	X 1.00	X 1	=	1.17	SQ.MT
P12	2.40	X	1.26	X 1.00	X 1	=	3.02	SQ.MT
P13	2.55	X	1.94	X 1.00	X 1	=	4.95	SQ.MT
P14	2.62	X	1.48	X 1.00	X 1	=	3.88	SQ.MT
P15	2.40	X	0.98	X 1.00	X 1	=	2.35	SQ.MT
TOTAL						=	**211.35**	**SQ.MT**
DUCT DEDUCTION (Y2)								
D1	1.15	X	0.60	X 1.00	X 2	=	1.38	SQ.MT
D2	2.28	X	0.45	X 1.00	X 1	=	1.03	SQ.MT
"	0.37	X	1.14	X 1.00	X 1	=	0.42	SQ.MT
D3	2.62	X	0.45	X 1.00	X 1	=	1.18	SQ.MT
D4	0.45	X	1.96	X 1.00	X 1	=	0.88	SQ.MT
TOTAL						=	**4.89**	**SQ.MT**
TOTAL DEDUCTION (Y2) (Y1 + Y2 + Y)						=	**579.58**	**SQ.MT**
BUILT-UP AREA(Y5) (X - Y4)						=	**655.27**	**SQ.MT**



RERA CARPET AREA CALCULATION FLAT NO. 1,2,5 & 6 (WING-A)
SCALE- 1:100

RERA CARPET AREA CALCULATION
FLAT NO. 1, 2, 5& 6

1	3.35	x	1.17	X	1.00	X 1	=	3.92 SQ.MT.
2	6.49	x	6.99	X	1.00	X 1	=	45.37 SQ.MT.
3	4.97	x	1.01	X	1.00	X 1	=	5.02 SQ.MT.
4	3.75	x	5.79	X	1.00	X 1	=	21.71 SQ.MT.
5	3.65	x	1.41	X	1.00	X 1	=	5.15 SQ.MT.
6	4.24	x	1.46	X	1.00	X 1	=	6.19 SQ.MT.
7	1.05	x	0.15	X	1.00	X 1	=	0.16 SQ.MT.
8	2.97	x	0.83	X	1.00	X 1	=	2.46 SQ.MT.
TOTAL							=	**89.97 SQ.MT.**



RERA CARPET AREA CALCULATION FLAT NO. 3,4,7 & 8 (WING-A)
SCALE- 1:100

RERA CARPET AREA CALCULATION
FLAT NO. 3,4,7,8

1	3.80	x	3.40	X	1.00	X 1	=	12.92 SQ.MT.
2	5.84	x	5.27	X	1.00	X 1	=	30.80 SQ.MT.
3	2.34	x	2.70	X	1.00	X 1	=	6.32 SQ.MT.
4	7.58	x	1.28	X	1.00	X 1	=	9.66 SQ.MT.
5	0.15	x	1.05	X	1.00	X 1	=	0.16 SQ.MT.
TOTAL							=	**59.86 SQ.MT.**

DOOR SCHEDULE

FLOOR	FLOOR	DOOR	DOOR SIZE	DOOR SHUTTER	DESCRIPTION	REMARK
1	1	FRD	1.5 X 2.36	2.36	FIRE RESISTANT DOOR	STAIRCASE
1	1	D1	1.1 X 2.36	2.36	T.W FRAME WITH M.P FLUSH DOOR	MAIN DOOR
1	1	D2	0.9 X 2.36	2.36	T.W FRAME WITH M.P FLUSH DOOR	BED ROOM
4	1	D3	0.75 X 2.36	2.36	MARBLE/GRANITE FRAME WITH FRP DOOR	TOILET

WINDOW SCHEDULE


FLOOR	FLOOR	WINDOW	WINDOW SIZE	WINDOW SHUTTER	WINDOW SHUTTER DETAIL	DESCRIPTION	REMARK
1	9	1	2.83 X 1.46	0.80	2.30	2.00	RAILING / FIXED GLASS WINDOW	STAIRCASE
2	8-1	1	1.83 X 1.40	0.80	2.30	2.10	RAILING / FIXED GLASS WINDOW	LIVING ROOM
3	8-2	1	2.3 X 2.15	1.15	2.30	4.84	ALUMINIUM SLIDING WINDOW	BED ROOM
4	8-1	1	2.3 X 2.15	0.80	2.30	3.37	ALUMINIUM SLIDING WINDOW	N.BED ROOM
5	8-4	2	0.9 X 1.73	0.80	2.30	3.72	ALUMINIUM SLIDING WINDOW	KITCHEN
6	9	1	1.75 X 1.08	1.08	2.30	3.71	LOUVERS VENTILATOR	TOILETS & DUCT

REFUGE AREA STATEMENT FOR 7TH (REFUGE) FLR. (WING- A)


REFUGE AREA AT 7TH FLOOR	=	4% OF ABOVE HABITABLE AREA		
	=	4%	X	4309.83
REFUGE REQUIRED	=	**175.59**		**SQ.MT**
REFUGE PROVIDED	=	**197.19**		**SQ.MT**
WITHIN 4.25 % REIGE AREA NOT COUNTED IN FSI	=	186.57		SQ.MT
EXCESS REIUGE AREA COUNTED IN FSI	=	10.62		SQ.MT

REFUGE AREA STATEMENT FOR 14TH (REFUGE) FLR. (WING- A)

REFUGE AREA AT 14TH FLOOR	=	4% OF ABOVE HABITABLE AREA		
	=	4%	X	3734.56
REFUGE REQUIRED	=	**149.38**		**SQ.MT**
REFUGE PROVIDED	=	**197.19**		**SQ.MT**
WITHIN 4.25 % REIGE AREA NOT COUNTED IN FSI	=	158.72		SQ.MT
EXCESS REIUGE AREA COUNTED IN FSI	=	38.47		SQ.MT

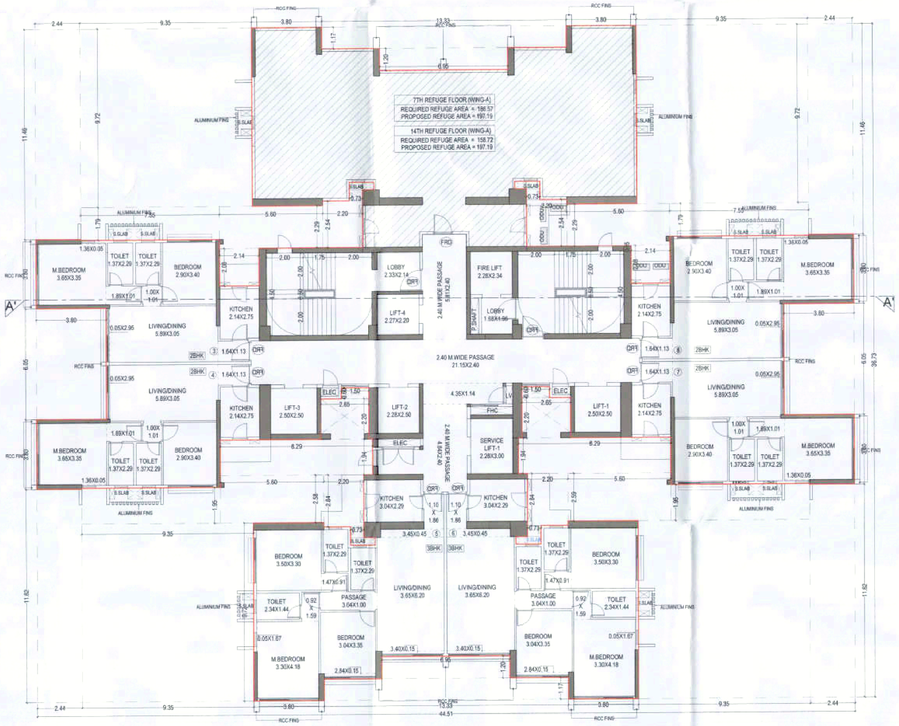

7TH & 14TH REFUGE FLOOR PLAN (WING-A)
SCALE- 1:100

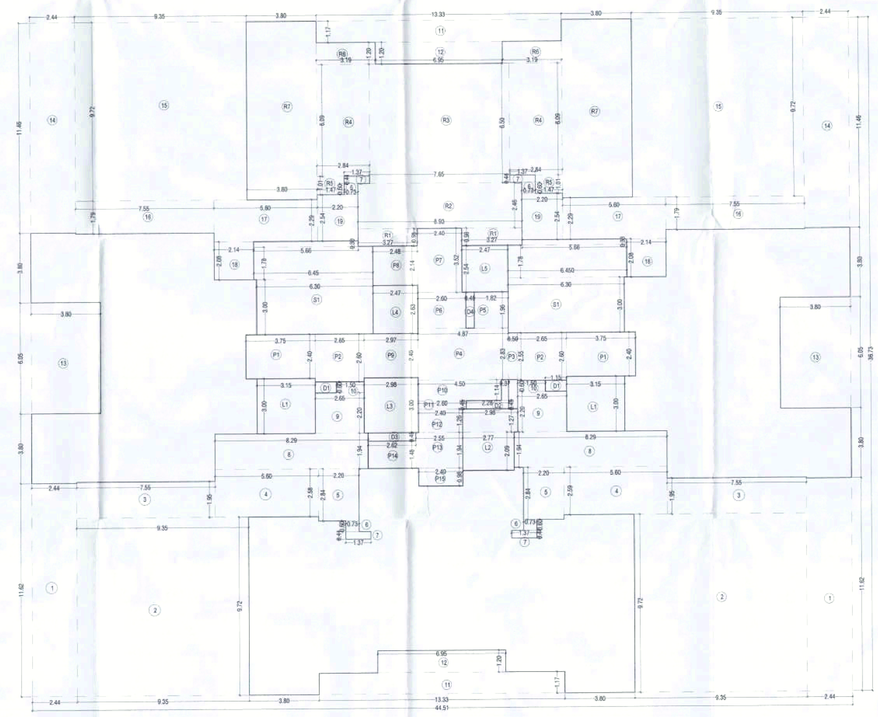

LINE AREA DIAGRAM FOR 7TH & 14TH REFUGE FLOOR (WING-A)
SCALE- 1:100

BUILT UP AREA CALCULATION FOR WING - A
7TH REFUGE FLOOR

ADDITION (X)								
A	44.51	X	36.73	X 1.00	X 1	=	1634.85	SQ.MT
TOTAL						=	**1634.85**	**SQ.MT**
STANDARD DEDUCTION (Y1)								
1	2.44	X	11.62	X 1.00	X 2	=	56.71	SQ.MT
2	9.35	X	9.72	X 1.00	X 2	=	181.76	SQ.MT
3	7.55	X	1.95	X 1.00	X 2	=	29.45	SQ.MT
4	5.60	X	2.59	X 1.00	X 2	=	29.01	SQ.MT
5	2.20	X	2.84	X 1.00	X 2	=	12.50	SQ.MT
6	0.73	X	0.60	X 1.00	X 4	=	1.75	SQ.MT
7	1.37	X	0.41	X 1.00	X 4	=	2.25	SQ.MT
8	8.29	X	1.94	X 1.00	X 2	=	32.17	SQ.MT
9	2.65	X	2.20	X 1.00	X 2	=	11.66	SQ.MT
10	1.50	X	0.60	X 1.00	X 2	=	1.80	SQ.MT
11	13.33	X	1.17	X 1.00	X 2	=	31.19	SQ.MT
12	6.95	X	1.20	X 1.00	X 2	=	16.68	SQ.MT
13	3.80	X	6.05	X 1.00	X 2	=	45.98	SQ.MT
14	2.44	X	11.46	X 1.00	X 2	=	55.92	SQ.MT
15	9.35	X	9.72	X 1.00	X 2	=	181.76	SQ.MT
16	7.55	X	1.79	X 1.00	X 2	=	27.03	SQ.MT
17	5.60	X	2.29	X 1.00	X 2	=	25.65	SQ.MT
18	2.14	X	2.08	X 1.00	X 2	=	8.90	SQ.MT
19	2.20	X	2.54	X 1.00	X 2	=	11.18	SQ.MT
TOTAL						=	**783.34**	**SQ.MT**
STAIRCASE,LIFT & LOBBY DEDUCTION (Y2)								
ST	8.30	X	3.00	X 1.00	X 2	=	37.80	SQ.MT
"	6.45	X	1.78	X 1.00	X 2	=	22.96	SQ.MT
"	5.66	X	0.30	X 1.00	X 2	=	3.40	SQ.MT
L1	3.15	X	3.00	X 1.00	X 2	=	18.90	SQ.MT
L2	2.77	X	2.09	X 1.00	X 1	=	5.79	SQ.MT
"	2.98	X	1.27	X 1.00	X 1	=	3.78	SQ.MT
L3	2.98	X	3.00	X 1.00	X 1	=	8.94	SQ.MT
L4	2.47	X	2.63	X 1.00	X 1	=	6.50	SQ.MT
L5	2.47	X	2.54	X 1.00	X 1	=	6.27	SQ.MT
P1	3.75	X	2.40	X 1.00	X 2	=	18.00	SQ.MT
P2	2.65	X	2.60	X 1.00	X 2	=	13.78	SQ.MT
P3	0.50	X	2.55	X 1.00	X 1	=	1.28	SQ.MT
P4	4.87	X	2.63	X 1.00	X 1	=	13.78	SQ.MT
P5	1.82	X	1.96	X 1.00	X 1	=	3.57	SQ.MT
P6	2.60	X	1.96	X 1.00	X 1	=	5.10	SQ.MT
P7	2.40	X	3.52	X 1.00	X 1	=	8.45	SQ.MT
P8	2.48	X	2.14	X 1.00	X 1	=	5.31	SQ.MT
P9	2.97	X	2.40	X 1.00	X 1	=	7.13	SQ.MT
P10	4.50	X	1.14	X 1.00	X 1	=	5.13	SQ.MT
P11	2.60	X	0.45	X 1.00	X 1	=	1.17	SQ.MT
P12	2.40	X	1.26	X 1.00	X 1	=	3.02	SQ.MT
P13	2.55	X	1.94	X 1.00	X 1	=	4.95	SQ.MT
P14	2.62	X	1.48	X 1.00	X 1	=	3.88	SQ.MT
P15	2.40	X	0.98	X 1.00	X 1	=	2.35	SQ.MT
TOTAL						=	**211.23**	**SQ.MT**
DUCT DEDUCTION (Y3)								
D1	1.15	X	0.60	X 1.00	X 2	=	1.38	SQ.MT
D2	2.28	X	0.45	X 1.00	X 1	=	1.03	SQ.MT
"	0.37	X	1.14	X 1.00	X 1	=	0.42	SQ.MT
D3	2.62	X	0.45	X 1.00	X 1	=	1.18	SQ.MT
D4	0.45	X	1.96	X 1.00	X 1	=	0.88	SQ.MT
TOTAL						=	**4.89**	**SQ.MT**
REFUGE DEDUCTION (Y4)								
R1	3.27	X	0.98	X 1.00	X 2	=	6.41	SQ.MT
R2	8.93	X	2.46	X 1.00	X 1	=	21.97	SQ.MT
R3	7.65	X	6.50	X 1.00	X 1	=	49.73	SQ.MT
R4	2.84	X	6.09	X 1.00	X 2	=	34.59	SQ.MT
R5	1.47	X	1.01	X 1.00	X 2	=	2.97	SQ.MT
R6	3.19	X	1.20	X 1.00	X 2	=	7.66	SQ.MT
R7	3.80	X	9.72	X 1.00	X 2	=	73.87	SQ.MT
TOTAL						=	**197.19**	**SQ.MT**
REQUIRED REFUGE AREA (Y5)						=	186.57	SQ.MT
TOTAL DEDUCTION (Y6) (Y1+Y2+Y3)						=	**1176.64**	**SQ.MT**
BUILT-UP AREA (Y7) (X - Y6)						=	**458.21**	**SQ.MT**
EXCES REFUGE AREA (Y8) (Y4-Y5)						=	**10.62**	**SQ.MT**
TOTAL BUILT-UP AREA (Y9) (Y7+Y8)						=	**468.83**	**SQ.MT**

BUILT UP AREA CALCULATION FOR WING - A
14TH REFUGE FLOOR

ADDITION (X)								
A	44.51	X	36.73	X 1.00	X 1	=	1634.85	SQ.MT
TOTAL						=	**1634.85**	**SQ.MT**
STANDARD DEDUCTION (Y1)								
1	2.44	X	11.62	X 1.00	X 2	=	56.71	SQ.MT
2	9.35	X	9.72	X 1.00	X 2	=	181.76	SQ.MT
3	7.55	X	1.95	X 1.00	X 2	=	29.45	SQ.MT
4	5.60	X	2.59	X 1.00	X 2	=	29.01	SQ.MT
5	2.20	X	2.84	X 1.00	X 2	=	12.50	SQ.MT
6	0.73	X	0.60	X 1.00	X 4	=	1.75	SQ.MT
7	1.37	X	0.41	X 1.00	X 4	=	2.25	SQ.MT
8	8.29	X	1.94	X 1.00	X 2	=	32.17	SQ.MT
9	2.65	X	2.20	X 1.00	X 2	=	11.66	SQ.MT
10	1.50	X	0.60	X 1.00	X 2	=	1.80	SQ.MT
11	13.33	X	1.17	X 1.00	X 2	=	31.19	SQ.MT
12	6.95	X	1.20	X 1.00	X 2	=	16.68	SQ.MT
13	3.80	X	6.05	X 1.00	X 2	=	45.98	SQ.MT
14	2.44	X	11.46	X 1.00	X 2	=	55.92	SQ.MT
15	9.35	X	9.72	X 1.00	X 2	=	181.76	SQ.MT
16	7.55	X	1.79	X 1.00	X 2	=	27.03	SQ.MT
17	5.60	X	2.29	X 1.00	X 2	=	25.65	SQ.MT
18	2.14	X	2.08	X 1.00	X 2	=	8.90	SQ.MT
19	2.20	X	2.54	X 1.00	X 2	=	11.18	SQ.MT
TOTAL						=	**783.34**	**SQ.MT**
STAIRCASE,LIFT & LOBBY DEDUCTION (Y2)								
ST	8.30	X	3.00	X 1.00	X 2	=	37.80	SQ.MT
"	6.45	X	1.78	X 1.00	X 2	=	22.96	SQ.MT
"	5.66	X	0.30	X 1.00	X 2	=	3.40	SQ.MT
L1	3.15	X	3.00	X 1.00	X 2	=	18.90	SQ.MT
L2	2.77	X	2.09	X 1.00	X 1	=	5.79	SQ.MT
"	2.98	X	1.27	X 1.00	X 1	=	3.78	SQ.MT
L3	2.98	X	3.00	X 1.00	X 1	=	8.94	SQ.MT
L4	2.47	X	2.63	X 1.00	X 1	=	6.50	SQ.MT
L5	2.47	X	2.54	X 1.00	X 1	=	6.27	SQ.MT
P1	3.75	X	2.40	X 1.00	X 2	=	18.00	SQ.MT
P2	2.65	X	2.60	X 1.00	X 2	=	13.78	SQ.MT
P3	0.50	X	2.55	X 1.00	X 1	=	1.28	SQ.MT
P4	4.87	X	2.63	X 1.00	X 1	=	13.78	SQ.MT
P5	1.82	X	1.96	X 1.00	X 1	=	3.57	SQ.MT
P6	2.60	X	1.96	X 1.00	X 1	=	5.10	SQ.MT
P7	2.40	X	3.52	X 1.00	X 1	=	8.45	SQ.MT
P8	2.48	X	2.14	X 1.00	X 1	=	5.31	SQ.MT
P9	2.97	X	2.40	X 1.00	X 1	=	7.13	SQ.MT
P10	4.50	X	1.14	X 1.00	X 1	=	5.13	SQ.MT
P11	2.60	X	0.45	X 1.00	X 1	=	1.17	SQ.MT
P12	2.40	X	1.26	X 1.00	X 1	=	3.02	SQ.MT
P13	2.55	X	1.94	X 1.00	X 1	=	4.95	SQ.MT
P14	2.62	X	1.48	X 1.00	X 1	=	3.88	SQ.MT
P15	2.40	X	0.98	X 1.00	X 1	=	2.35	SQ.MT
TOTAL						=	**211.23**	**SQ.MT**
DUCT DEDUCTION (Y3)								
D1	1.15	X	0.60	X 1.00	X 2	=	1.38	SQ.MT
D2	2.28	X	0.45	X 1.00	X 1	=	1.03	SQ.MT
"	0.37	X	1.14	X 1.00	X 1	=	0.42	SQ.MT
D3	2.62	X	0.45	X 1.00	X 1	=	1.18	SQ.MT
D4	0.45	X	1.96	X 1.00	X 1	=	0.88	SQ.MT
TOTAL						=	**4.89**	**SQ.MT**
REFUGE DEDUCTION (Y4)								
R1	3.27	X	0.98	X 1.00	X 2	=	6.41	SQ.MT
R2	8.93	X	2.46	X 1.00	X 1	=	21.97	SQ.MT
R3	7.65	X	6.50	X 1.00	X 1	=	49.73	SQ.MT
R4	2.84	X	6.09	X 1.00	X 2	=	34.59	SQ.MT
R5	1.47	X	1.01	X 1.00	X 2	=	2.97	SQ.MT
R6	3.19	X	1.20	X 1.00	X 2	=	7.66	SQ.MT
R7	3.80	X	9.72	X 1.00	X 2	=	73.87	SQ.MT
TOTAL						=	**197.19**	**SQ.MT**
REQUIRED REFUGE AREA (Y5)						=	158.72	SQ.MT
TOTAL DEDUCTION (Y6) (Y1+Y2+Y3)						=	**1176.64**	**SQ.MT**
BUILT-UP AREA (Y7) (X - Y6)						=	**458.21**	**SQ.MT**
EXCES REFUGE AREA (Y8) (Y4-Y5)						=	**38.47**	**SQ.MT**
TOTAL BUILT-UP AREA (Y9) (Y7+Y8)						=	**496.68**	**SQ.MT**

CARPET AREA STATEMENT
FLAT NO. 1, 2, 5 & 6

LIVING/DINING	3.65	x	6.20	=	22.63	SQ.MT.
"	3.40	x	0.15	=	0.51	SQ.MT.
"	3.45	x	0.45	=	1.55	SQ.MT.
"	1.10	x	1.86	=	2.05	SQ.MT.
KITCHEN	2.97	x	2.29	=	6.80	SQ.MT.
PASSAGE	3.04	x	1.00	=	3.04	SQ.MT.
TOILET	1.37	x	2.29	=	3.14	SQ.MT.
BEDROOM-1	3.04	x	3.35	=	10.18	SQ.MT.
"	2.84	x	0.15	=	0.43	SQ.MT.
BEDROOM-2	3.50	x	3.30	=	11.55	SQ.MT.
"	1.47	x	0.91	=	1.34	SQ.MT.
TOILET	1.37	x	2.29	=	3.14	SQ.MT.
M.BEDROOM	3.30	x	4.18	=	13.79	SQ.MT.
"	0.05	x	1.67	=	0.08	SQ.MT.
"	0.92	x	1.59	=	1.46	SQ.MT.
TOILET	2.34	x	1.59	=	3.72	SQ.MT.
TOTAL				=	**85.41**	**SQ.MT.**

CARPET AREA STATEMENT
FLAT NO. 3, 4, 7 & 8

LIVING/DINING	5.89	x	3.05	=	17.96	SQ.MT.
"	0.05	x	2.95	=	0.15	SQ.MT.
"	1.64	x	1.13	=	1.85	SQ.MT.
KITCHEN	2.14	x	2.75	=	5.89	SQ.MT.
PASSAGE	1.00	x	1.01	=	1.01	SQ.MT.
TOILET	1.37	x	2.29	=	3.14	SQ.MT.
BEDROOM	2.90	x	3.40	=	9.86	SQ.MT.
M.BEDROOM	3.65	x	3.35	=	12.23	SQ.MT.
"	1.36	x	0.05	=	0.07	SQ.MT.
"	1.89	x	1.01	=	1.91	SQ.MT.
TOILET	1.37	x	2.29	=	3.14	SQ.MT.
TOTAL				=	**57.20**	**SQ.MT.**

DESCRIPTION OF PROPOSAL & PROPERTY

PROPOSED RESIDENTIAL BUILDING ON SUB-PLOT A BEARING OLD CTS.NO. 158,159,160,161(PT),162(PT) & 165(PT), NEW CTS NO.165A/5 OF VILLAGE GOREGAON

DWG NO.	REVISIONS	DATE	SCALE	DISCRIPTION
05 / 06	-	-	1 : 100	

DRAWN BY- -
CHECKED BY- -
NORTH

NAME OF THE OWNER
M/s. SATGURU CORPORATE SERVICES PRIVATE LIMITED

SIGNATURE OF THE OWNER

NAME OF ARCHITECT: DEVYANI KHADILKAR
UIC. NO.: CA/90/13184

ADDRESS: SPACEAGE CONSULTANTS, B-106, Natraj Building, Mulund Goregaon Link Road Mulund (w), Mumbai : 400 080