
CONTENTS OF SHEET

2ND TO 6TH PODIUM FLOOR PLAN, LINE AREA DIAGRAM
& AREA CALCULATION.


WING -6

BUILT UP AREA CALCULATION FOR 2ND TO 6TH PODIUM FLOOR (WING-6)

Item	Calculation	=	Area	Ref
A	48.50 X 29.81 X 1 NO	=	1445.79 SQ.MT.	
	TOTAL ADDITION	=	1445.79 SQ.MT.	X
DEDUCTIONS				
1	1.02 X 3.30 X 1 NO	=	3.37 SQ.MT.	
2	1.62 X 0.35 X 1 NO	=	0.57 SQ.MT.	
3	14.06 X 4.30 X 1 NO	=	60.46 SQ.MT.	
4	0.50 X 1.20 X 2 NOS	=	1.20 SQ.MT.	
5	11.45 X 1.60 X 1 NO	=	18.32 SQ.MT.	
6	0.15 X 3.37 X 1 NO	=	0.51 SQ.MT.	
7	2.90 X 0.77 X 1 NO	=	2.23 SQ.MT.	
8	6.98 X 3.37 X 1 NO	=	23.52 SQ.MT.	
9	4.46 X 8.50 X 1 NO	=	37.91 SQ.MT.	
10	7.22 X 10.07 X 1 NO	=	72.71 SQ.MT.	
11	5.41 X 10.70 X 1 NO	=	57.89 SQ.MT.	
12	3.25 X 0.50 X 1 NO	=	1.63 SQ.MT.	
13	10.18 X 1.27 X 1 NO	=	12.93 SQ.MT.	
14	2.70 X 2.64 X 1 NO	=	7.13 SQ.MT.	
15	3.50 X 4.97 X 1 NO	=	17.40 SQ.MT.	
16	4.54 X 2.20 X 1 NO	=	9.99 SQ.MT.	
17	2.76 X 2.93 X 1 NO	=	8.09 SQ.MT.	
18	3.33 X 0.85 X 2 NOS	=	5.66 SQ.MT.	
19	0.55 X 0.55 X 1 NO	=	0.30 SQ.MT.	
20	11.83 X 4.95 X 1 NO	=	58.56 SQ.MT.	
21	12.21 X 6.18 X 1 NO	=	75.46 SQ.MT.	
22	4.77 X 2.11 X 1 NO	=	10.06 SQ.MT.	
23	8.15 X 1.71 X 1 NO	=	13.94 SQ.MT.	
24	4.77 X 2.11 X 1 NO	=	10.06 SQ.MT.	
25	9.68 X 6.18 X 1 NO	=	59.82 SQ.MT.	
26	0.55 X 0.55 X 1 NO	=	0.30 SQ.MT.	
27	2.76 X 2.60 X 1 NO	=	7.18 SQ.MT.	
28	3.50 X 2.45 X 1 NO	=	8.58 SQ.MT.	
29	1.26 X 2.27 X 1 NO	=	2.86 SQ.MT.	
30	1.36 X 2.85 X 1 NO	=	3.88 SQ.MT.	
31	3.03 X 2.67 X 1 NO	=	8.09 SQ.MT.	
32	2.48 X 0.70 X 1 NO	=	1.74 SQ.MT.	
33	1.97 X 0.58 X 1 NO	=	1.14 SQ.MT.	
34	3.60 X 3.67 X 1 NO	=	13.21 SQ.MT.	
35	5.70 X 3.32 X 1 NO	=	18.92 SQ.MT.	
36	1.02 X 3.30 X 1 NO	=	3.37 SQ.MT.	
37	0.55 X 3.05 X 1 NO	=	1.68 SQ.MT.	
38	0.15 X 7.10 X 1 NO	=	1.07 SQ.MT.	
39	0.55 X 3.05 X 1 NO	=	1.68 SQ.MT.	
	TOTAL DEDUCTION	=	643.42 SQ.MT.	Y1
TOTAL BUILT UP AREA [X - Y1]		=	802.37 SQ.MT.	X1
LIFT AREA CALCULATION				
L1	11.43 X 2.95 X 1 NO	=	33.72 SQ.MT.	
L2	0.30 X 2.80 X 1 NO	=	0.84 SQ.MT.	
L3	11.44 X 2.95 X 1 NO	=	33.75 SQ.MT.	
L4	0.30 X 2.80 X 1 NO	=	0.84 SQ.MT.	
L5	3.30 X 2.20 X 1 NO	=	7.26 SQ.MT.	
L6	3.15 X 0.17 X 1 NO	=	0.54 SQ.MT.	
L7	3.25 X 2.82 X 1 NO	=	9.16 SQ.MT.	
TOTAL LIFT AREA PER FL. (TYPICAL FLOOR)		=	86.11 SQ.MT.	Y2
LIFT VOID AREA CALCULATION				
LV1	3.00 X 2.45 X 2 NOS	=	14.70 SQ.MT.	
LV2	3.00 X 2.45 X 2 NOS	=	14.70 SQ.MT.	
LV3	4.73 X 2.45 X 2 NOS	=	23.18 SQ.MT.	
LV4	2.85 X 2.30 X 1 NO	=	6.56 SQ.MT.	
	TOTAL DEDUCTION	=	59.14 SQ.MT.	Y1
STAIRCASE AREA CALCULATION				
ST1	7.12 X 4.82 X 1 NO	=	34.32 SQ.MT.	
ST4	6.83 X 4.50 X 1 NO	=	30.74 SQ.MT.	
ST5	3.48 X 0.18 X 1 NO	=	0.63 SQ.MT.	
ST6	3.17 X 0.33 X 1 NO	=	1.05 SQ.MT.	
TOTAL STAIRCASE AREA PER FL. (TYPICAL FLOOR)		=	66.74 SQ.MT.	Y3
LIFT LOBBY AREA CALCULATION				
LL1	2.90 X 2.51 X 1 NO	=	7.28 SQ.MT.	
LL2	2.60 X 0.49 X 1 NO	=	1.27 SQ.MT.	
LL3	1.31 X 1.82 X 1 NO	=	2.38 SQ.MT.	
LL4	3.25 X 2.65 X 1 NO	=	8.61 SQ.MT.	
LL5	1.36 X 2.95 X 1 NO	=	4.01 SQ.MT.	
LL6	3.25 X 2.60 X 1 NO	=	8.45 SQ.MT.	
LL7	6.48 X 2.80 X 1 NO	=	18.14 SQ.MT.	
LL8	2.95 X 3.25 X 1 NO	=	9.59 SQ.MT.	
LL9	0.35 X 3.25 X 1 NO	=	1.14 SQ.MT.	
LL10	6.78 X 2.80 X 1 NO	=	18.98 SQ.MT.	
LL11	0.30 X 0.45 X 1 NO	=	0.14 SQ.MT.	
LL12	4.31 X 2.95 X 1 NO	=	12.71 SQ.MT.	
LL13	2.60 X 4.50 X 1 NO	=	11.70 SQ.MT.	
LL14	0.15 X 1.57 X 1 NO	=	0.24 SQ.MT.	
TOTAL LIFT LOBBY AREA PER FL. (TYPICAL FLOOR)		=	104.64 SQ.MT.	Y4
DUCT AREA CALCULATION				
D1	1.23 X 0.50 X 1 NO	=	0.62 SQ.MT.	
D2	1.22 X 0.63 X 1 NO	=	0.77 SQ.MT.	
D3	0.20 X 1.07 X 1 NO	=	0.21 SQ.MT.	
ED	6.48 X 0.45 X 1 NO	=	2.92 SQ.MT.	
FD	6.48 X 0.45 X 1 NO	=	2.92 SQ.MT.	
TOTAL DUCT AREA PER FL. (TYPICAL FLOOR)		=	7.44 SQ.MT.	Y5
NET BUILT UP AREA [X1 - (Y2+Y3+Y4+Y5)]		=	537.44 SQ.MT.	

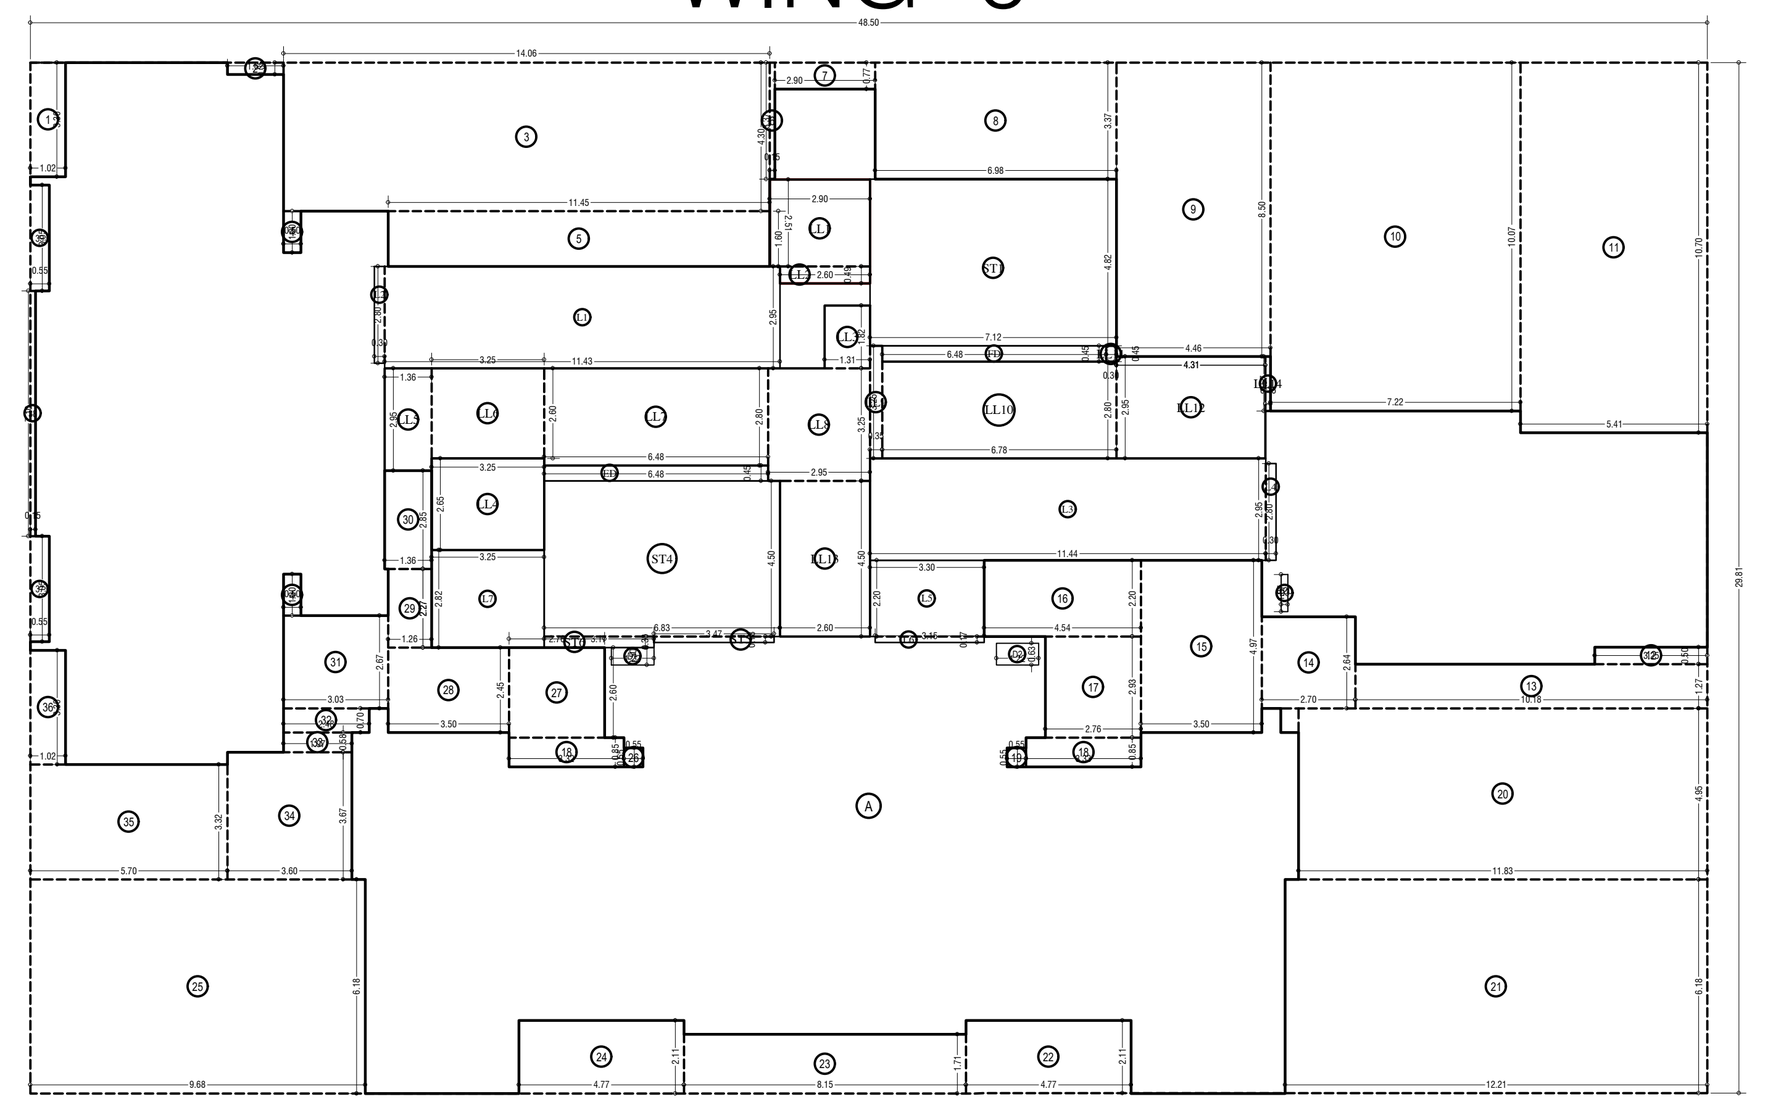

LINE AREA DIA. FOR 2ND TO 6th TYPICAL PODIUM FLOOR. (WING- 6)
SCALE - 1:100



TOILET- LINE AREA DIAGRAM (WING-1 & 6)
SCALE - 1:200

TOILET BUILT UP AREA CALCULATION				
1	2.90 X 1.85 X 1 NO	=	5.37 SQ.MT.	
2	1.85 X 2.90 X 1 NO	=	5.37 SQ.MT.	
	TOTAL ADDITION	=	10.74 SQ.MT.	X
	DRIVER TOILET (B)	=	6.60 SQ.MT.	B
	TOTAL TOILET (A-B)	=	4.14 SQ.MT.	



2ND PODIUM FLOOR PLAN

SCALE- 1:300

PROPOSED OF CAR PARKING PODIUM 2ND FLOOR LEVEL		
BIG CAR	=	398
SMALL CAR	=	198
TOTAL NUMBER OF CAR	=	596
TWO WHEELER	=	18


2ND PODIUM FLOOR BUILT UP AREA SUMMARY	
WING	BUILT-UP AREA
1	508.30
2	300.89
3	467.77
4	467.77
5	441.67
6	0.00
TOILET	4.14
TOTAL BUA	2190.54

WING -1

BUILT UP AREA CALCULATION FOR 2ND TO 6TH TYPICAL FL. (WING-1)

Item	Calculation	=	Area	Ref
A	44.18 X 28.95 X 1 NO	=	1279.01 SQ.MT.	
	TOTAL ADDITION	=	1279.01 SQ.MT.	X
DEDUCTIONS				
1	5.28 X 5.93 X 1 NO	=	31.31 SQ.MT.	
2	10.08 X 0.70 X 1 NO	=	7.06 SQ.MT.	
3	9.55 X 2.88 X 1 NO	=	27.50 SQ.MT.	
4	0.50 X 0.70 X 1 NO	=	0.35 SQ.MT.	
5	5.03 X 1.40 X 1 NO	=	7.04 SQ.MT.	
6	1.48 X 1.83 X 1 NO	=	2.71 SQ.MT.	
7	5.68 X 1.40 X 1 NO	=	7.95 SQ.MT.	
8	5.58 X 2.63 X 1 NO	=	14.68 SQ.MT.	
9	1.73 X 2.13 X 1 NO	=	3.68 SQ.MT.	
10	3.98 X 1.23 X 1 NO	=	4.90 SQ.MT.	
11	6.20 X 0.58 X 1 NO	=	3.60 SQ.MT.	
12	1.53 X 1.08 X 1 NO	=	1.65 SQ.MT.	
13	2.75 X 0.15 X 1 NO	=	0.41 SQ.MT.	
14	11.23 X 1.13 X 1 NO	=	12.69 SQ.MT.	
15	1.98 X 1.78 X 1 NO	=	3.52 SQ.MT.	
16	24.45 X 1.68 X 1 NO	=	41.08 SQ.MT.	
17	1.68 X 0.45 X 2 NOS	=	1.51 SQ.MT.	
18	4.53 X 2.60 X 1 NO	=	11.78 SQ.MT.	
19	2.55 X 0.98 X 1 NO	=	2.50 SQ.MT.	
20	1.19 X 0.83 X 1 NO	=	0.99 SQ.MT.	
21	0.34 X 0.53 X 2 NOS	=	0.36 SQ.MT.	
22	19.15 X 1.90 X 1 NO	=	36.39 SQ.MT.	
23	2.10 X 0.70 X 1 NO	=	1.47 SQ.MT.	
24	16.58 X 4.95 X 1 NO	=	82.07 SQ.MT.	
25	17.10 X 6.15 X 1 NO	=	105.17 SQ.MT.	
26	4.85 X 2.08 X 2 NOS	=	20.18 SQ.MT.	
27	3.88 X 0.80 X 2 NOS	=	6.21 SQ.MT.	
28	0.30 X 0.70 X 1 NO	=	0.21 SQ.MT.	
29	0.43 X 6.15 X 1 NO	=	2.64 SQ.MT.	
30	3.74 X 0.83 X 1 NO	=	3.10 SQ.MT.	
31	2.55 X 2.75 X 1 NO	=	7.01 SQ.MT.	
32	1.98 X 2.60 X 1 NO	=	5.15 SQ.MT.	
33	5.30 X 1.68 X 1 NO	=	8.90 SQ.MT.	
34	9.55 X 2.18 X 1 NO	=	20.82 SQ.MT.	
35	0.50 X 3.58 X 1 NO	=	1.79 SQ.MT.	
36	2.10 X 12.63 X 1 NO	=	26.52 SQ.MT.	
	TOTAL DEDUCTION	=	514.90 SQ.MT.	Y1
TOTAL BUILT UP AREA [X - Y1]		=	764.11 SQ.MT.	X1

Item	Calculation	=	Area	Ref
LIFT AREA CALCULATION				
L1	10.20 X 3.35 X 1 NO	=	34.17 SQ.MT.	
L2	10.35 X 3.35 X 1 NO	=	34.67 SQ.MT.	
L3	3.13 X 2.23 X 1 NO	=	6.98 SQ.MT.	
L4	3.38 X 0.65 X 1 NO	=	2.20 SQ.MT.	
TOTAL LIFT AREA PER FL. (TYPICAL FLOOR)		=	78.02 SQ.MT.	Y2
STAIRCASE AREA CALCULATION				
ST1	7.18 X 4.88 X 1 NO	=	35.04 SQ.MT.	
ST2	7.08 X 4.88 X 1 NO	=	34.55 SQ.MT.	
TOTAL STAIRCASE AREA PER FL. (TYPICAL FLOOR)		=	69.59 SQ.MT.	Y3
LIFT LOBBY AREA CALCULATION				
LL1	2.90 X 2.18 X 2 NOS	=	12.64 SQ.MT.	
LL2	2.60 X 1.38 X 1 NO	=	3.59 SQ.MT.	
LL3	2.44 X 1.33 X 1 NO	=	3.25 SQ.MT.	
LL4	2.79 X 0.65 X 2 NOS	=	3.63 SQ.MT.	
LL5	3.53 X 2.83 X 1 NO	=	9.99 SQ.MT.	
LL6	6.48 X 2.73 X 2 NOS	=	35.38 SQ.MT.	
LL7	3.30 X 2.53 X 1 NO	=	8.35 SQ.MT.	
LL8	3.38 X 2.53 X 1 NO	=	8.55 SQ.MT.	
LL9	2.44 X 1.30 X 1 NO	=	3.17 SQ.MT.	
LL10	2.60 X 1.40 X 1 NO	=	3.64 SQ.MT.	
LL11	3.13 X 2.65 X 1 NO	=	8.29 SQ.MT.	
LL12	0.15 X 1.78 X 1 NO	=	0.27 SQ.MT.	
TOTAL LIFT LOBBY AREA PER FL. (TYPICAL FLOOR)		=	100.75 SQ.MT.	Y4
DUCT AREA CALCULATION				
D1	6.48 X 0.45 X 2 NOS	=	5.83 SQ.MT.	
D2	1.53 X 0.35 X 2 NOS	=	1.07 SQ.MT.	
D3	0.38 X 1.45 X 1 NO	=	0.55 SQ.MT.	
TOTAL DUCT AREA PER FL. (TYPICAL FLOOR)		=	7.45 SQ.MT.	Y5
NET BUILT UP AREA [X1 - (Y2+Y3+Y4+Y5)]		=	508.30 SQ.MT.	

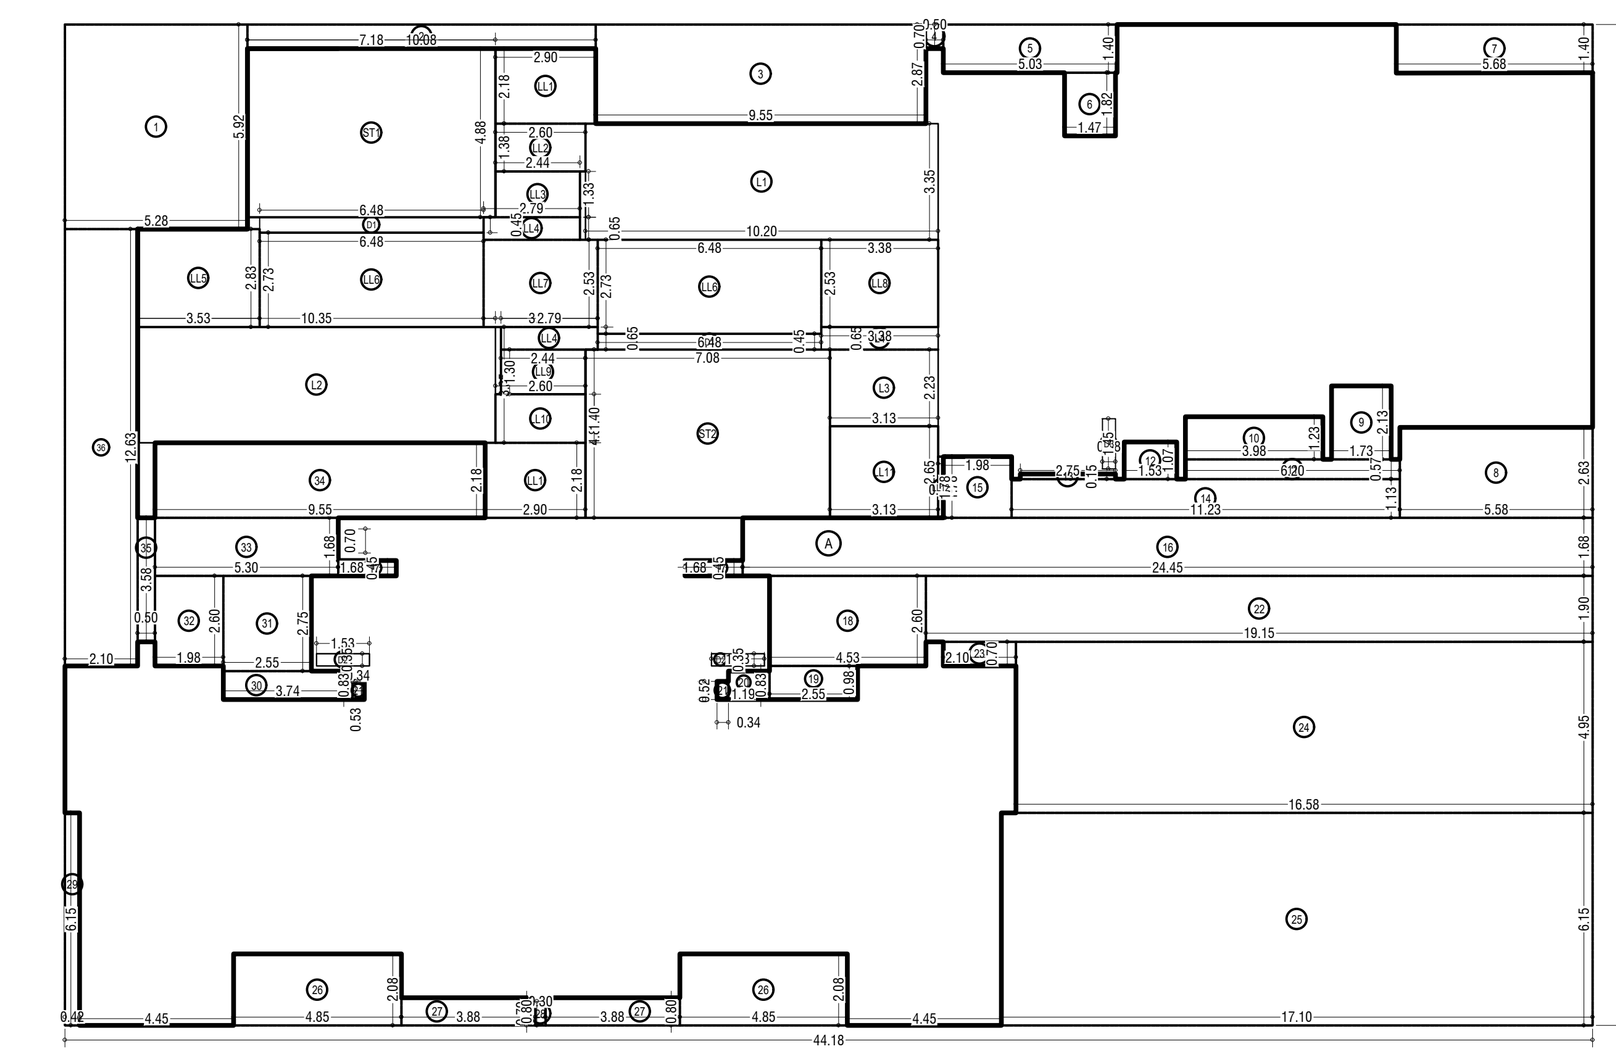


LINE AREA DIA. FOR 2ND TO 6TH PODIUM FLOOR. (WING- 1)
SCALE - 1:100

WING -2

BUILT UP AREA CALCULATION 2ND TO 6TH PODIUM TYP.FL.(WING-2)

Item	Calculation	=	Area	Unit
A	27.5 X 28.25 X 1.00 X 1	=	776.88	SQ.MT.
TOTAL ADDITION		=	776.88	SQ.MT.
DEDUCTIONS				
1	12.15 X 2.18 X 1.00 X 1	=	26.54	SQ.MT.
2	5.28 X 5.23 X 1.00 X 1	=	27.64	SQ.MT.
3	2.10 X 6.18 X 1.00 X 1	=	12.98	SQ.MT.
4	12.10 X 1.83 X 1.00 X 1	=	22.20	SQ.MT.
5	7.01 X 2.03 X 1.00 X 1	=	14.23	SQ.MT.
6	0.78 X 1.68 X 1.00 X 2	=	2.62	SQ.MT.
7	1.68 X 0.45 X 1.00 X 2	=	1.51	SQ.MT.
8	4.95 X 1.90 X 1.00 X 2	=	18.86	SQ.MT.
9	2.10 X 2.60 X 1.00 X 2	=	10.92	SQ.MT.
10	4.53 X 0.70 X 1.00 X 2	=	6.34	SQ.MT.
11	2.55 X 0.98 X 1.00 X 2	=	5.00	SQ.MT.
12	1.19 X 0.83 X 1.00 X 2	=	1.98	SQ.MT.
13	0.34 X 0.53 X 1.00 X 2	=	0.36	SQ.MT.
14	0.43 X 6.15 X 1.00 X 2	=	5.29	SQ.MT.
15	4.85 X 2.08 X 1.00 X 2	=	20.18	SQ.MT.
16	3.88 X 0.80 X 1.00 X 2	=	6.21	SQ.MT.
17	0.30 X 0.70 X 1.00 X 1	=	0.21	SQ.MT.
18	7.01 X 1.68 X 1.00 X 1	=	11.78	SQ.MT.
19	2.10 X 11.40 X 1.00 X 1	=	23.94	SQ.MT.
TOTAL DEDUCTION		=	218.78	SQ.MT.
TOTAL BUILT UP AREA [X - Y1]		=	558.10	SQ.MT.
LIFT AREA CALCULATION				
L1	10.35 X 3.35 X 1.00 X 2	=	69.35	SQ.MT.
L2	3.28 X 2.23 X 1.00 X 1	=	7.31	SQ.MT.
L3	3.53 X 0.65 X 1.00 X 1	=	2.29	SQ.MT.
TOTAL LIFT AREA PER FL. (TYPICAL FLOOR)		=	78.95	SQ.MT.
STAIRCASE AREA CALCULATION				
ST1	7.18 X 4.88 X 1.00 X 1	=	35.04	SQ.MT.
ST2	7.08 X 4.73 X 1.00 X 1	=	33.49	SQ.MT.
ST3	2.53 X 0.15 X 1.00 X 1	=	0.38	SQ.MT.
TOTAL STAIRCASE AREA PER FL. (TYPICAL FLOOR)		=	68.91	SQ.MT.
LIFT LOBBY AREA CALCULATION				
LL1	2.60 X 3.55 X 1.00 X 1	=	9.23	SQ.MT.
LL2	0.30 X 2.18 X 1.00 X 1	=	0.65	SQ.MT.
LL3	2.50 X 1.32 X 1.00 X 1	=	3.30	SQ.MT.
LL4	2.85 X 0.45 X 1.00 X 1	=	1.28	SQ.MT.
"	2.85 X 0.20 X 1.00 X 1	=	0.57	SQ.MT.
LL5	3.53 X 2.83 X 1.00 X 1	=	9.96	SQ.MT.
"	0.35 X 0.35 X 1.00 X 1	=	0.12	SQ.MT.
LL6	6.48 X 2.73 X 1.00 X 1	=	17.64	SQ.MT.
LL7	3.30 X 2.52 X 1.00 X 1	=	8.32	SQ.MT.
LL8	2.85 X 0.65 X 1.00 X 1	=	1.85	SQ.MT.
LL9	6.48 X 2.73 X 1.00 X 1	=	17.64	SQ.MT.
LL10	3.53 X 2.53 X 1.00 X 1	=	8.92	SQ.MT.
LL11	2.50 X 1.30 X 1.00 X 1	=	3.25	SQ.MT.
LL12	2.60 X 4.00 X 1.00 X 1	=	10.40	SQ.MT.
LL13	0.30 X 2.03 X 1.00 X 1	=	0.61	SQ.MT.
LL14	3.28 X 2.65 X 1.00 X 1	=	8.69	SQ.MT.
TOTAL LIFT LOBBY AREA PER FL. (TYPICAL FLOOR)		=	102.44	SQ.MT.
LIFT VOID AREA DEDUCTION (Y2 A)				
LV1	2.30 X 2.80 X 1.00 X 4	=	25.76	SQ.MT.
LV2	4.45 X 2.80 X 1.00 X 2	=	24.92	SQ.MT.
LV3	2.78 X 2.48 X 1.00 X 1	=	6.89	SQ.MT.
TOTAL		=	57.57	SQ.MT.
TOTAL ST, LL, LO & PASS. PREMIUM AREA		=	44.87	SQ.MT.
DUCT AREA CALCULATION				
D1	6.48 X 0.45 X 1.00 X 2	=	5.83	SQ.MT.
D2	1.53 X 0.35 X 1.00 X 2	=	1.07	SQ.MT.
TOTAL DUCT AREA PER FL. (TYPICAL FLOOR)		=	6.90	SQ.MT.
NET BUILT UP AREA CALCULATION WING 2 [X1 - (Y2+Y3+Y4+Y5)]		=	300.89	SQ.MT.

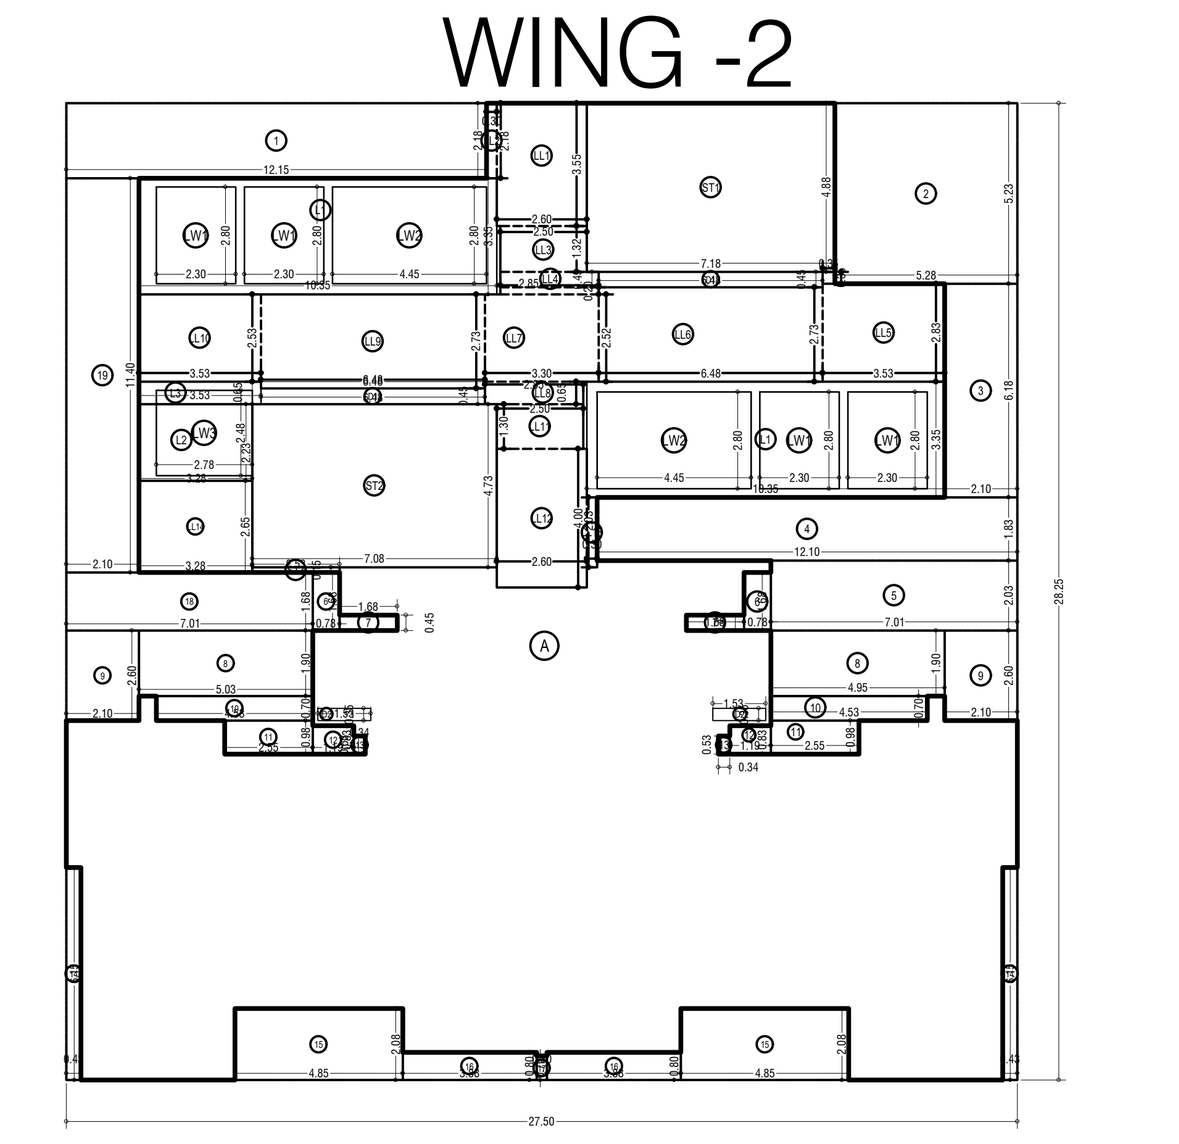


2ND TO 6TH PODIUM TYPICAL FLOOR. (WING- 2)
SCALE - 1:100

WING -5

BUILT UP AREA CALCULATION FOR 2ND TO 6TH PODIUM FLOOR. (WING - 5)

Item	Calculation	=	Area	Ref
TYPICAL FLOOR				
1	51.02 X 26.43 X 1 NO	=	1348.46 SQ.MT.	
	TOTAL ADDITION	=	1348.46 SQ.MT.	X
DEDUCTIONS				
1	5.45 X 7.33 X 1 NO	=	39.95 SQ.MT.	
2	7.18 X 6.70 X 1 NO	=	48.11 SQ.MT.	
3	4.51 X 5.12 X 1 NO	=	23.09 SQ.MT.	
4	11.43 X 2.52 X 1 NO	=	28.80 SQ.MT.	
5	7.02 X 6.69 X 1 NO	=	46.96 SQ.MT.	
5a	0.14 X 1.23 X 1 NO	=	0.17 SQ.MT.	
6	5.45 X 7.32 X 1 NO	=	39.89 SQ.MT.	
7	0.05 X 1.52 X 1 NO	=	0.08 SQ.MT.	
8	3.45 X 0.50 X 1 NO	=	1.73 SQ.MT.	
9	10.18 X 1.28 X 1 NO	=	13.03 SQ.MT.	
10	2.70 X 2.65 X 1 NO	=	7.16 SQ.MT.	
11	1.41 X 2.85 X 1 NO	=	4.02 SQ.MT.	
12	1.31 X 4.73 X 1 NO	=	6.20 SQ.MT.	
13	4.95 X 2.45 X 1 NO	=	12.13 SQ.MT.	
14	12.33 X 0.70 X 1 NO	=	8.63 SQ.MT.	
15	11.76 X 4.25 X 1 NO	=	49.98 SQ.MT.	
16	12.21 X 6.18 X 1 NO	=	75.46 SQ.MT.	
17	4.77 X 2.11 X 1 NO	=	10.06 SQ.MT.	
18	8.15 X 1.71 X 1 NO	=	13.94 SQ.MT.	
19	4.77 X 2.11 X 1 NO	=	10.06 SQ.MT.	
20	12.21 X 6.19 X 1 NO	=	75.58 SQ.MT.	
21	11.82 X 4.25 X 1 NO	=	50.24 SQ.MT.	
22	3.45 X 2.47 X 1 NO	=	8.52 SQ.MT.	
23	6.72 X 1.97 X 1 NO	=	13.24 SQ.MT.	
24	2.15 X 3.35 X 1 NO	=	7.20 SQ.MT.	
25	0.55 X 2.65 X 1 NO	=	1.46 SQ.MT.	
26	8.04 X 2.20 X 1 NO	=	17.69 SQ.MT.	
27	6.26 X 2.77 X 1 NO	=	17.34 SQ.MT.	
28	0.05 X 1.53 X 1 NO	=	0.08 SQ.MT.	
29	2.76 X 1.00 X 2 NOS	=	5.52 SQ.MT.	
30	0.56 X 0.85 X 2 NOS	=	0.95 SQ.MT.	
31	0.55 X 0.55 X 2 NOS	=	0.61 SQ.MT.	
ED	6.43 X 0.45 X 1 NO	=	2.89 SQ.MT.	
FD	6.43 X 0.45 X 1 NO	=	2.89 SQ.MT.	
	TOTAL DEDUCTION	=	643.66 SQ.MT.	Y1
TOTAL BUILT UP AREA [X - Y1]		=	704.80 SQ.MT.	X1
LIFT AREA CALCULATION				
TYPICAL FLOOR				
L1	0.30 X 2.80 X 1 NO	=	0.84 SQ.MT.	
L2	11.44 X 2.95 X 1 NO	=	33.75 SQ.MT.	
L3	3.30 X 2.20 X 1 NO	=	7.26 SQ.MT.	
L4	3.15 X 0.18 X 1 NO	=	0.57 SQ.MT.	
L5	11.73 X 2.95 X 1 NO	=	34.60 SQ.MT.	
L6	3.25 X 2.95 X 1 NO	=	9.59 SQ.MT.	
TOTAL LIFT AREA PER FL. (TYPICAL FLOOR)		=	86.61 SQ.MT.	Y2
STAIRCASE AREA CALCULATION				
TYPICAL FLOOR				
S1	7.07 X 4.83 X 1 NO	=	34.15 SQ.MT.	
S2	0.15 X 4.50 X 1 NO	=	0.68 SQ.MT.	
S3	6.62 X 4.67 X 1 NO	=	30.92 SQ.MT.	
S4	3.12 X 0.15 X 1 NO	=	0.47 SQ.MT.	
TOTAL STAIRCASE AREA PER FL. (TYPICAL FLOOR)		=	66.22 SQ.MT.	Y3
LIFT LOBBY AREA CALCULATION				
TYPICAL FLOOR				
LO1	4.81 X 1.58 X 1 NO	=	7.60 SQ.MT.	
LO2	4.66 X 1.37 X 1 NO	=	6.38 SQ.MT.	
LO3	6.43 X 2.80 X 1 NO	=	18.00 SQ.MT.	
LO4	2.90 X 2.52 X 1 NO	=	7.31 SQ.MT.	
LO5	2.60 X 2.30 X 1 NO	=	5.98 SQ.MT.	
LO6	2.95 X 3.25 X 1 NO	=	9.59 SQ.MT.	
LO7	2.60 X 0.20 X 1 NO	=	0.52 SQ.MT.	
LO8	2.95 X 0.45 X 1 NO	=	1.33 SQ.MT.	
LO9	6.78 X 2.80 X 1 NO	=	18.98 SQ.MT.	
LO10	4.66 X 2.60 X 1 NO	=	12.12 SQ.MT.	
LO11	0.15 X 1.23 X 1 NO	=	0.18 SQ.MT.	
LO12	1.41 X 0.35 X 1 NO	=	0.49 SQ.MT.	
LO13	2.60 X 4.50 X 1 NO	=	11.70 SQ.MT.	
LO14	3.25 X 2.52 X 1 NO	=	8.19 SQ.MT.	
TOTAL LIFT LOBBY AREA PER FL. (TYPICAL FLOOR)		=	108.37 SQ.MT.	Y4
DUCT AREA CALCULATION				
TYPICAL FLOOR				
D1	0.20 X 1.07 X 1 NO	=	0.21 SQ.MT.	
D2	0.20 X 1.08 X 1 NO	=	0.22 SQ.MT.	
D3	1.27 X 0.68 X 1 NO	=	0.86 SQ.MT.	
D4	1.27 X 0.50 X 1 NO	=	0.64 SQ.MT.	
TOTAL DUCT AREA PER FL. (TYPICAL FLOOR)		=	1.93 SQ.MT.	Y5
NET BUILT UP AREA [X1 - (Y2+Y3+Y4+Y5)]		=	441.67 SQ.MT.	

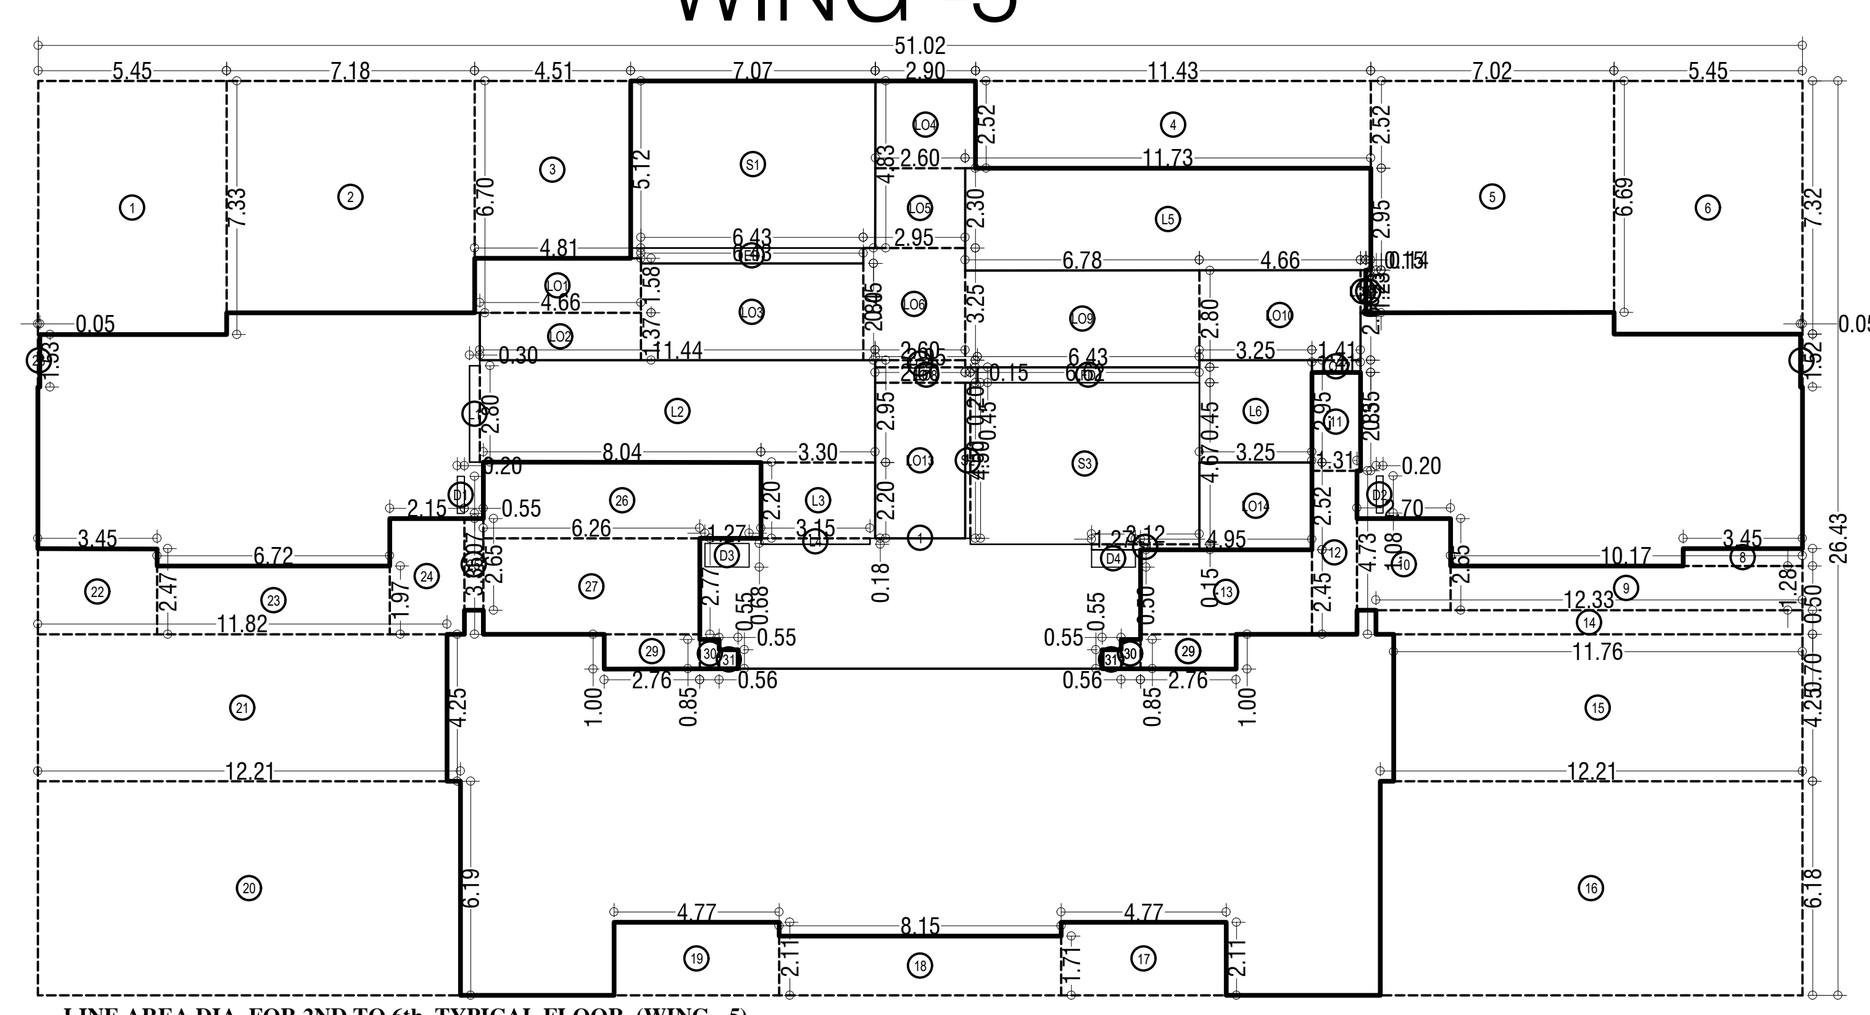


LINE AREA DIA. FOR 2ND TO 6th TYPICAL FLOOR. (WING - 5)
SCALE - 1:100

WING -4

BUILT UP AREA CALCULATION FOR 2ND TO 6TH PODIUM FLOOR. (WING - 4)

Item	Calculation	=	Area	Ref
FOR WING-4				
1	43.08 X 29.86 X 1 NO	=	1286.37 SQ.MT.	
	TOTAL ADDITION	=	1286.37 SQ.MT.	X
DEDUCTIONS				
1	1.23 X 3.25 X 1 NO	=	4.00 SQ.MT.	
2	0.50 X 3.05 X 1 NO	=	1.53 SQ.MT.	
3	1.50 X 0.70 X 1 NO	=	1.05 SQ.MT.	
4	0.49 X 5.65 X 1 NO	=	2.77 SQ.MT.	
5	1.98 X 4.43 X 1 NO	=	8.77 SQ.MT.	
6	0.45 X 3.58 X 1 NO	=	1.61 SQ.MT.	
7	4.98 X 5.70 X 1 NO	=	28.39 SQ.MT.	
8	0.82 X 3.72 X 1 NO	=	3.05 SQ.MT.	
9	12.72 X 1.66 X 1 NO	=	21.12 SQ.MT.	
10	2.86 X 8.38 X 1 NO	=	23.97 SQ.MT.	
11	6.88 X 9.93 X 1 NO	=	68.32 SQ.MT.	
12	5.65 X 10.75 X 1 NO	=	60.74 SQ.MT.	
13	0.75 X 1.38 X 1 NO	=	1.04 SQ.MT.	
14	3.25 X 4.33 X 1 NO	=	14.07 SQ.MT.	
15	3.65 X 3.60 X 1 NO	=	13.14 SQ.MT.	
16	3.30 X 3.68 X 1 NO	=	12.14 SQ.MT.	
17	2.03 X 5.25 X 1 NO	=	10.66 SQ.MT.	
18	0.45 X 3.71 X 1 NO	=	1.67 SQ.MT.	
19	1.15 X 2.98 X 1 NO	=	3.43 SQ.MT.	
20	4.56 X 3.60 X 1 NO	=	16.42 SQ.MT.	
21	3.68 X 2.08 X 1 NO	=	7.65 SQ.MT.	
22	1.07 X 0.45 X 1 NO	=	0.48 SQ.MT.	
23	3.68 X 0.70 X 1 NO	=	2.58 SQ.MT.	
24	9.88 X 6.78 X 1 NO	=	66.99 SQ.MT.	
25	11.70 X 2.27 X 1 NO	=	26.56 SQ.MT.	
26	3.60 X 0.60 X 1 NO	=	2.16 SQ.MT.	
27	13.15 X 0.90 X 1 NO	=	11.84 SQ.MT.	
28	3.60 X 0.60 X 1 NO	=	2.16 SQ.MT.	
29	10.33 X 2.27 X 1 NO	=	23.45 SQ.MT.	
30	8.50 X 6.78 X 1 NO	=	57.63 SQ.MT.	
31	5.58 X 0.81 X 1 NO	=	4.52 SQ.MT.	
32	1.50 X 1.51 X 1 NO	=	2.27 SQ.MT.	
33	0.49 X 1.22 X 1 NO	=	0.60 SQ.MT.	
34	2.47 X 5.23 X 1 NO	=	12.92 SQ.MT.	
35	0.45 X 3.23 X 1 NO	=	1.66 SQ.MT.	
36	1.45 X 5.60 X 1 NO	=	8.12 SQ.MT.	
37	2.23 X 1.10 X 1 NO	=	2.45 SQ.MT.	
38	1.87 X 1.15 X 1 NO	=	2.15 SQ.MT.	
39	4.98 X 2.45 X 1 NO	=	12.20 SQ.MT.	
40	1.08 X 0.45 X 1 NO	=	0.49 SQ.MT.	
41	1.22 X 3.25 X 1 NO	=	3.97 SQ.MT.	
42	0.50 X 3.05 X 1 NO	=	1.53 SQ.MT.	
43	0.22 X 6.80 X 1 NO	=	1.50 SQ.MT.	
ED	0.45 X 3.12 X 1 NO	=	1.40 SQ.MT.	
FD	0.45 X 3.13 X 1 NO	=	1.41 SQ.MT.	
	TOTAL DEDUCTION	=	556.58 SQ.MT.	Y1
TOTAL BUILT UP AREA [X - Y1]		=	729.79 SQ.MT.	X1
LIFT AREA CALCULATION				
L1	0.30 X 2.85 X 1 NO	=	0.86 SQ.MT.	
L2	5.80 X 3.00 X 1 NO	=	17.40 SQ.MT.	
L3	3.75 X 7.05 X 1 NO	=	26.44 SQ.MT.	
L5	2.85 X 3.33 X 1 NO	=	9.49 SQ.MT.	
L6	3.70 X 6.73 X 1 NO	=	24.90 SQ.MT.	
L7	3.55 X 0.17 X 1 NO	=	0.60 SQ.MT.	
L8	3.40 X 3.13 X 1 NO	=	10.64 SQ.MT.	
L9	0.15 X 2.98 X 1 NO	=	0.45 SQ.MT.	
TOTAL LIFT AREA PER FL. (TYPICAL FLOOR)		=	90.78 SQ.MT.	Y2
STAIRCASE AREA CALCULATION				
S1	5.25 X 3.10 X 1 NO	=	16.28 SQ.MT.	
S2	4.55 X 3.95 X 1 NO	=	17.97 SQ.MT.	
S3	0.20 X 1.15 X 1 NO	=	0.23 SQ.MT.	
S4	4.85 X 3.95 X 1 NO	=	19.16 SQ.MT.	
S5	5.55 X 3.10 X 1 NO	=	17.21 SQ.MT.	
TOTAL STAIRCASE AREA PER FL. (TYPICAL FLOOR)		=	70.85 SQ.MT.	Y3
LIFT LOBBY AREA CALCULATION				
LO1	1.45 X 2.95 X 1 NO	=	4.28 SQ.MT.	
LO2	8.10 X 2.60 X 1 NO	=	21.06 SQ.MT.	
LO3	3.30 X 0.83 X 1 NO	=	2.74 SQ.MT.	
LO4	2.80 X 3.12 X 1 NO	=	8.74 SQ.MT.	
LO5	2.60 X 8.80 X 1 NO	=	22.88 SQ.MT.	
LO6	2.80 X 3.12 X 1 NO	=	8.74 SQ.MT.	
LO7	3.30 X 0.50 X 1 NO	=	1.65 SQ.MT.	
LO8	5.55 X 2.60 X 1 NO	=	14.43 SQ.MT.	
LO9	1.15 X 0.15 X 1 NO	=	0.17 SQ.MT.	
LO10	2.86 X 1.55 X 1 NO	=	4.43 SQ.MT.	
LO11	2.71 X 1.38 X 1 NO	=	3.74 SQ.MT.	
LO12	2.85 X 2.57 X 1 NO	=	7.32 SQ.MT.	
TOTAL LIFT LOBBY AREA PER FL. (TYPICAL FLOOR)		=	100.18 SQ.MT.	Y4
DUCT AREA CALCULATION				
D1	0.20 X 1.05 X 1 NO	=	0.21 SQ.MT.	
TOTAL DUCT AREA PER FL. (TYPICAL FLOOR)		=	0.21 SQ.MT.	Y5
NET BUILT UP AREA [X1 - (Y2+Y3+Y4+Y5)]		=	467.77 SQ.MT.	

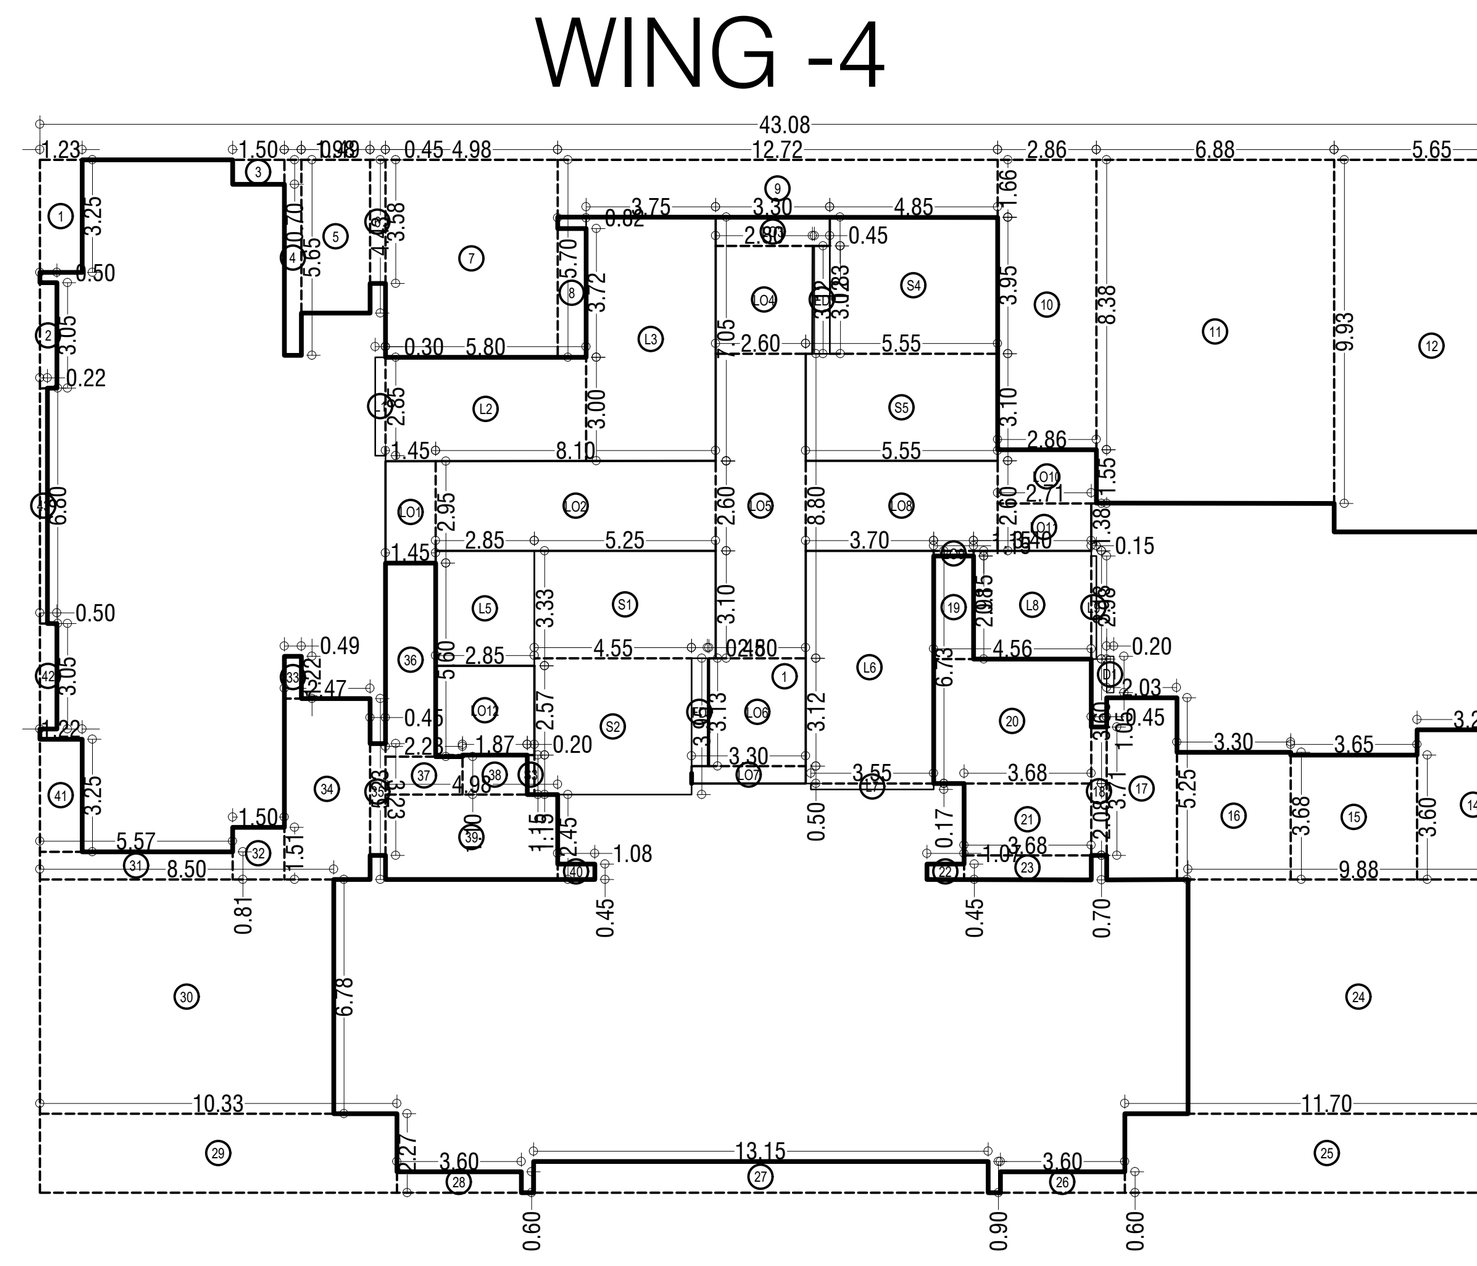


LINE AREA DIA. FOR 2ND TO 6th TYPICAL FLOOR. (WING - 4)
SCALE - 1:100

WING -3

BUILT UP AREA CALCULATION FOR 2ND TO 6TH PODIUM FLOOR. (WING - 3)

Item	Calculation	=	Area	Ref
FOR WING-4				
1	43.08 X 29.86 X 1 NO	=	1286.37 SQ.MT	
	TOTAL ADDITION	=	1286.37 SQ.MT	X
DEDUCTIONS				
1	1.23 X 3.25 X 1 NO	=	4.00 SQ.MT	
2	0.50 X 3.05 X 1 NO	=	1.53 SQ.MT	
3	1.50 X 0.70 X 1 NO	=	1.05 SQ.MT	
4	0.49 X 5.65 X 1 NO	=	2.77 SQ.MT	
5	1.98 X 4.43 X 1 NO	=	8.77 SQ.MT	
6	0.45 X 3.13 X 1 NO	=	1.61 SQ.MT	
7	4.98 X 5.70 X 1 NO	=	28.39 SQ.MT	
8	0.82 X 3.72 X 1 NO	=	3.05 SQ.MT	
9	12.72 X 1.66 X 1 NO	=	21.12 SQ.MT	
10	2.86 X 8.38 X 1 NO	=	23.97 SQ.MT	
11	6.88 X 9.93 X 1 NO	=	68.32 SQ.MT	
12	5.65 X 10.75 X 1 NO	=	60.74 SQ.MT	
13	0.75 X 1.38 X 1 NO	=	1.04 SQ.MT	
14	3.25 X 4.33 X 1 NO	=	14.07 SQ.MT	
15	3.65 X 3.60 X 1 NO	=	13.14 SQ.MT	
16	3.30 X 3.68 X 1 NO	=	12.14 SQ.MT	
17	2.03 X 5.25 X 1 NO	=	10.66 SQ.MT	
18	0.45 X 3.25 X 1 NO	=	1.67 SQ.MT	
19	1.15 X 2.98 X 1 NO	=	3.43 SQ.MT	
20	4.56 X 3.60 X 1 NO	=	16.42 SQ.MT	
21	3.68 X 2.08 X 1 NO	=	7.65 SQ.MT	
22	1.07 X 0.45 X 1 NO	=	0.48 SQ.MT	
23	3.68 X 0.70 X 1 NO	=	2.58 SQ.MT	
24	9.88 X 6.78 X 1 NO	=	66.99 SQ.MT	
25	11.70 X 2.27 X 1 NO	=	26.56 SQ.MT	
26	3.60 X 0.60 X 1 NO	=	2.16 SQ.MT	
27	13.15 X 0.90 X 1 NO	=	11.84 SQ.MT	
28	3.60 X 0.60 X 1 NO	=	2.16 SQ.MT	
29	10.33 X 2.27 X 1 NO	=	23.45 SQ.MT	
30	8.50 X 6.78 X 1 NO	=	57.63 SQ.MT	
31	5.58 X 0.81 X 1 NO	=	4.52 SQ.MT	
32	1.50 X 1.51 X 1 NO	=	2.27 SQ.MT	
33	0.49 X 1.22 X 1 NO	=	0.60 SQ.MT	
34	2.47 X 5.23 X 1 NO	=	12.92 SQ.MT	
35	0.45 X 3.23 X 1 NO	=	1.66 SQ.MT	
36	1.45 X 5.60 X 1 NO	=	8.12 SQ.MT	
37	2.23 X 1.10 X 1 NO	=	2.45 SQ.MT	
38	1.87 X 1.15 X 1 NO	=	2.15 SQ.MT	
39	4.98 X 2.45 X 1 NO	=	12.20 SQ.MT	
40	1.08 X 0.45 X 1 NO	=	0.49 SQ.MT	
41	1.22 X 3.25 X 1 NO	=	3.97 SQ.MT	
42	0.50 X 3.05 X 1 NO	=	1.53 SQ.MT	
43	0.22 X 6.80 X 1 NO	=	1.50 SQ.MT	
ED	0.45 X 3.12 X 1 NO	=	1.40 SQ.MT	
FD	0.45 X 3.13 X 1 NO	=	1.41 SQ.MT	
	TOTAL DEDUCTION	=	556.58 SQ.MT	Y1
TOTAL BUILT UP AREA [X - Y1]		=	729.79 SQ.MT	X1

Item	Calculation	=	Area	Ref
LIFT AREA CALCULATION				
L1	0.30 X 2.85 X 1 NO	=	0.86 SQ.MT	
L2	5.80 X 3.00 X 1 NO	=	17.40 SQ.MT	
L3	3.75 X 7.05 X 1 NO	=	26.44 SQ.MT	
L5	2.85 X 3.33 X 1 NO	=	9.49 SQ.MT	
L6	3.70 X 6.73 X 1 NO	=	24.90 SQ.MT	
L7	3.55 X 0.17 X 1 NO	=	0.60 SQ.MT	
L8	3.40 X 3.13 X 1 NO	=	10.64 SQ.MT	
L9	0.15 X 2.98 X 1 NO	=	0.45 SQ.MT	
TOTAL LIFT AREA PER FL. (TYPICAL FLOOR)		=	90.78 SQ.MT	Y2
LIFT WELL AREA CALCULATION				
LW1	3.45 X 3.72 X 1 NO	=	12.83 SQ.MT	
LW2	2.75 X 2.50 X 1 NO	=	6.88 SQ.MT	
LW3	2.70 X 2.50 X 1 NO	=	6.75 SQ.MT	
LW4	2.69 X 2.49 X 1 NO	=	6.70 SQ.MT	
LW5	2.47 X 2.70 X 1 NO	=	6.67 SQ.MT	
LW6	3.20 X 3.60 X 1 NO	=	11.52 SQ.MT	
LW7	3.20 X 2.50 X 1 NO	=	8.00 SQ.MT	
LW8	3.20 X 2.50 X 1 NO	=	8.00 SQ.MT	
TOTAL LIFT WELL AREA PER FL. (TYP. FL.)		=	67.35 SQ.MT	L2
TOTAL LIFT AREA PER FL. (L1-L2)		=	22.19 SQ.MT	
STAIRCASE AREA CALCULATION				
S1	5.25 X 3.10 X 1 NO	=	16.28 SQ.MT	
S2	4.55 X 3.95 X 1 NO	=	17.97 SQ.MT	
S3	0.20 X 1.15 X 1 NO	=	0.23 SQ.MT	
S4	4.85 X 3.95 X 1 NO	=	19.16 SQ.MT	
S5	5.55 X 3.10 X 1 NO	=	17.21 SQ.MT	
TOTAL STAIRCASE AREA PER FL. (TYPICAL FLOOR)		=	70.85 SQ.MT	Y3
LIFT LOBBY AREA CALCULATION				
LO1	1.45 X 2.95 X 1 NO	=	4.28 SQ.MT	
LO2	8.10 X 2.60 X 1 NO	=	21.06 SQ.MT	
LO3	3.30 X 0.83 X 1 NO	=	2.74 SQ.MT	
LO4	2.80 X 3.12 X 1 NO	=	8.74 SQ.MT	
LO5	2.60 X 8.80 X 1 NO	=	22.88 SQ.MT	
LO6	2.80 X 3.12 X 1 NO	=	8.74 SQ.MT	
LO7	3.30 X 0.50 X 1 NO	=	1.65 SQ.MT	
LO8	5.55 X 2.60 X 1 NO	=	14.43 SQ.MT	
LO9	1.15 X 0.15 X 1 NO	=	0.17 SQ.MT	
LO10	2.86 X 1.55 X 1 NO	=	4.43 SQ.MT	
LO11	2.71 X 1.38 X 1 NO	=	3.74 SQ.MT	
LO12	2.85 X 2.57 X 1 NO	=	7.32 SQ.MT	
TOTAL LIFT LOBBY AREA PER FL. (TYPICAL FLOOR)		=	100.18 SQ.MT	Y4
DUCT AREA CALCULATION				
D1	0.20 X 1.05 X 1 NO	=	0.21 SQ.MT	
TOTAL DUCT AREA PER FL. (TYPICAL FLOOR)		=	0.21 SQ.MT	Y5
NET BUILT UP AREA FOR FSI [X1 - (Y2+Y3+Y4+Y5)]		=	467.77 SQ.MT	X1

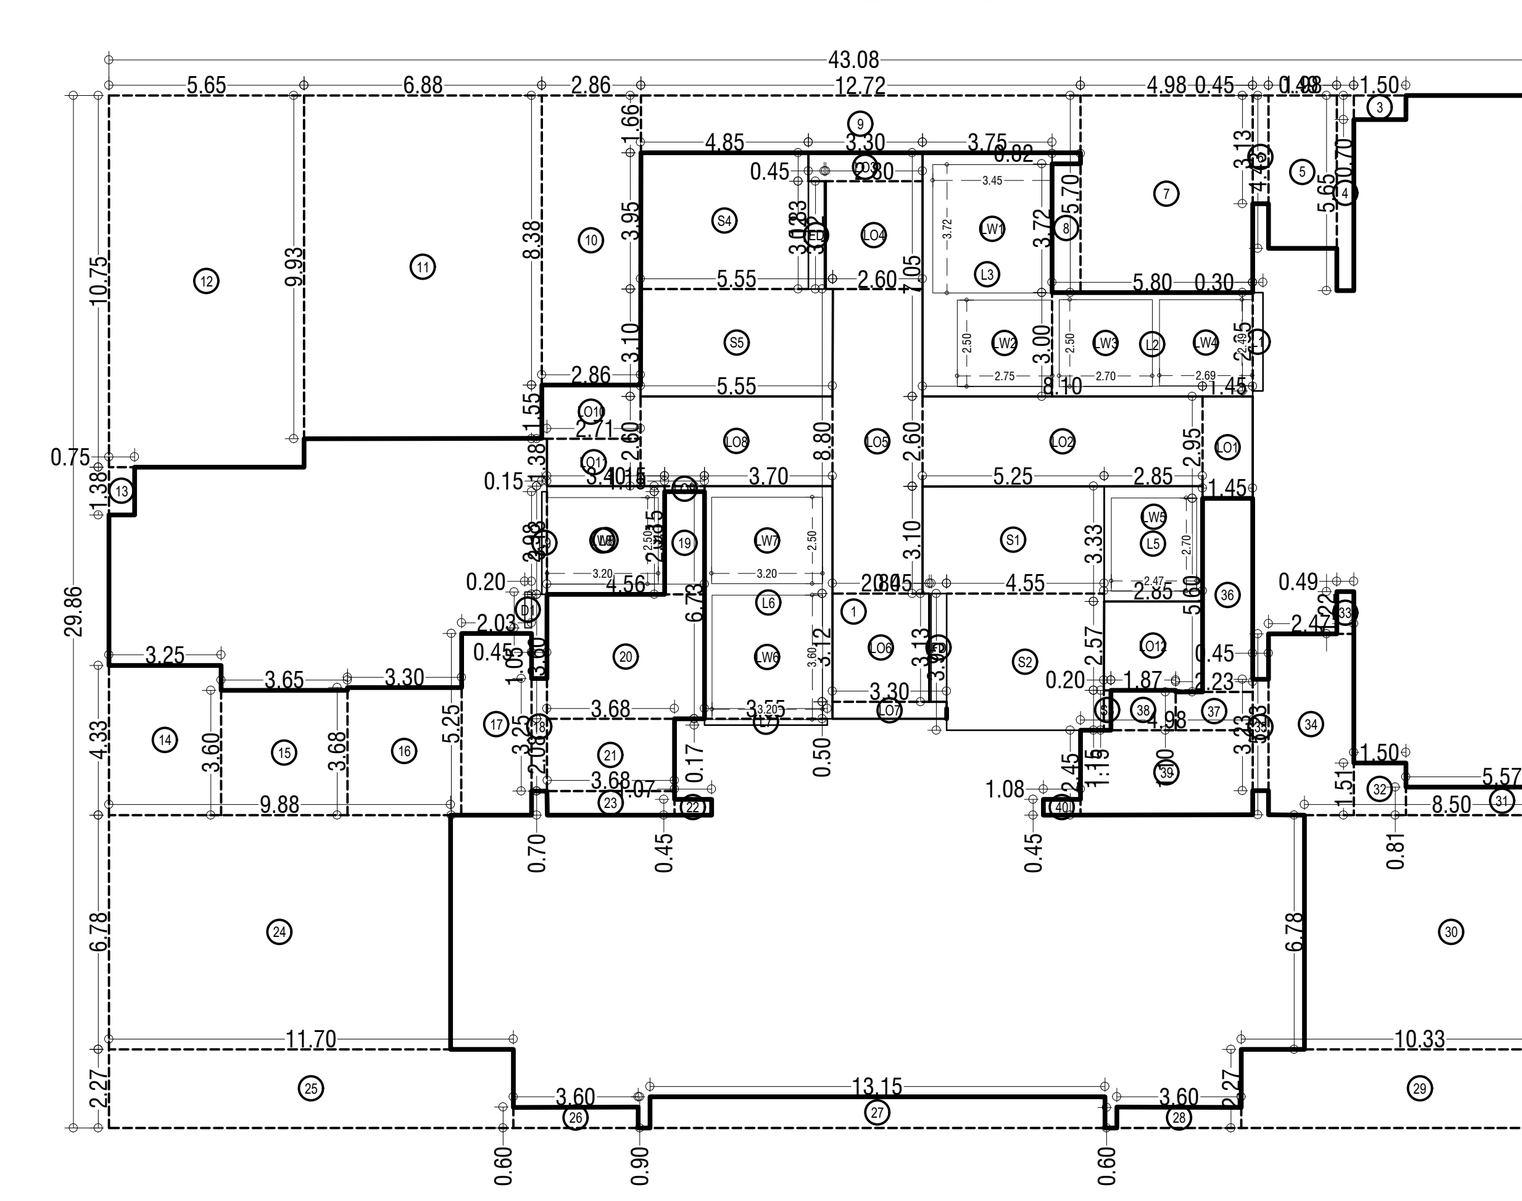

LINE AREA DIA. FOR 2ND TO 6th TYPICAL FLOOR. (WING - 3)
SCALE - 1:100

STAMP AND DATE OF RECEIPT OF PLAN

FILE NO.
P-17708/2023/(124 AND OTHER)/R/S WARD/AKURLI-R/S

NOTE:-
1) ALL DIMENSIONS ARE IN METER.
2) THIS PLAN IS DIGITALLY SIGNED AND PHYSICAL SIGN NOT REQUIRED
3) THIS CANCELS THE EARLIER APPROVAL ONLINE ISSUED UNDER NO P-17708/2023/(124 AND OTHER)/R/S WARD/AKURLI-R/S DATED -24.02.2025
4) THIS DRAWING SHALL BE READ IN CONJUNCTION WITH LETTER ISSUED UNDER NO P-17708/2023/(124 AND OTHER)/R/S WARD/AKURLI-R/S. ON EVEN DATED

PLAN FOR APPROVAL

ROHIT SURESHCHANDRA SONAR — Digitally signed by ROHIT SURESHCHANDRA SONAR Date: 2025.08.14 17:38:51 +05'30'	PANKAJKUMAR LILACHAND JADHAV — Digitally signed by PANKAJKUMAR LILACHAND JADHAV Date: 2025.08.18 14:09:11 +05'30'	SANTOSH UTTAMRAO RAUT — Digitally signed by SANTOSH UTTAMRAO RAUT Date: 2025.08.18 16:24:42 +05'30'
S.E.(B.P)R-2	A.E.(B.P) R- S	E.E.(B.P.)WS-II 'R-1'

DESCRIPTION OF PROPOSAL & PROPERTY

PROPOSED DEVELOPMENT ON PROPERTY BEARING CTS NO. 124, 125,126,127, 127/1, 128, 146, 146/1, 146/2, 146/3, 146/4, 146/5,146/6, 146/7 OF VILLAGE AKURLI , R/S WARD, MUMBAI-400101.

NORTH	JOB. NO.	DRG. NO.	DRAWN BY
	573	6/35	Prachi
	SCALE	DATE	CHECKED BY
	1:300		Ninad
REVISIONS	DESCRIPTION :		
R-0			

NAME AND ADDRESS OF DESIGN ARCHITECT

KAPADIA ASSOCIATES
DESIGN LLP, PAREL(E),
MUMBAI - 400012.

NAME OF THE OWNER	SIGNATURE
M/S. GODREJ PROPERTIES LIMITED	Naveen Kumar Poddar

NAME AND ADDRESS OF LICENSED SURVEYOR (L.S)	SIGNATURE
SPACEAGE CONSULTANTS, B-106, Natraj Building, Mulund Goregaon Link Road Mulund (w), Mumbai : 4000 080	Shashikant Laxman Jadhav