
PROPOSED POLYLINE AREA TABLE: PLOT NO. 37 TO 40 (ROW BUNGALOW)


Floor Name	FSI	Carpet	Stair	Lift	Passage	Tenement	Terrace	Balcony	SubStructure	Void	Chowk	V. Shaft
PLINTH	0.00	0.00	0.00	0.00	0.00	0	0.00	0.00	0.00	0.00	0.00	0.00
GROUND FLOOR	460.38	422.78	0.00	0.00	0.00	12	0.00	0.00	0.00	0.00	0.00	7.50
TERRACE FLOOR	0.00	0.00	0.00	0.00	0.00	0	460.38	0.00	0.00	0.00	0.00	7.50
Total	460.38	422.78	0.00	0.00	0.00	12	460.38	0.00	0.00	0.00	0.00	15.00

BUILDING WISE COVERAGE TABLE


BUILDING	AREA
PLOT NO. 37 TO 40 -1 (ROW BUNGALOW)	[illegible]




COMPOUND WALL SECTION




TRIANGLE	AREA
A-01	420.00
A-02	423.00
TOTAL (PLOT NO. 37 TO 40)	[illegible]



LOCATION PLAN
SCALE :- 1 : 10,000

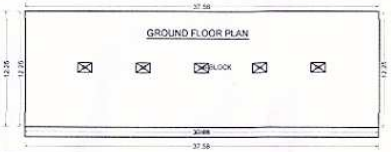

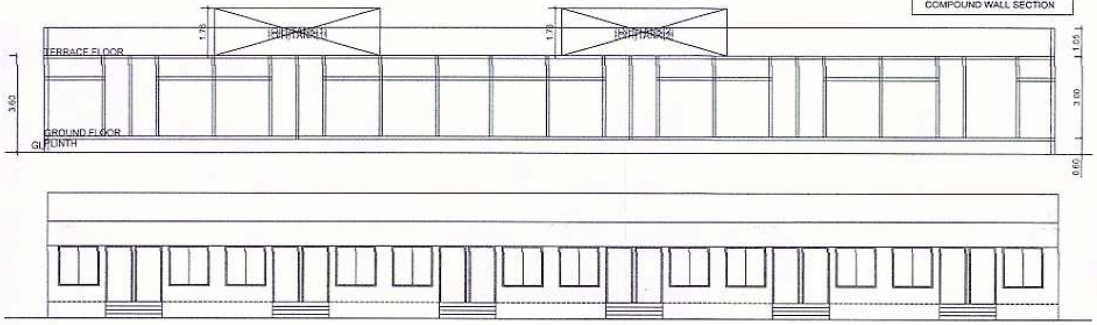


POLYGON	SIZE	AREA
A-BLOCK	12.26 X 37.58	460.38
D1	1.00 X 1.50	1.50
D2	1.00 X 1.50	1.50
D3	1.00 X 1.50	1.50
D4	1.00 X 1.50	1.50
D5	1.00 X 1.50	1.50
A-AP1	---	37.58
TOTAL		460.46

WATER REQUIREMENT

TANK		OCCUPANT LOAD / FACT		CONS / DAY (LIT)	REQD CAP. (LIT)	PROP CAP. (LIT)
	RESI.REQMT	12	5	80 / 135	8100	
OHWT	COM.REQMT.	-NA-		-NA-	-NA-	
		-NA-		-NA-	-NA-	
	IND.REQMT.	-NA-		-NA-	-NA-	
	SPE.REQMT.	-NA-		-NA-	-NA-	
					8100	
	FIRE REQMT.				0	
					8100	38107
UGWT			1.5		12150	0

PARKING CALCULATION

TYPE	BASIC AREA FOR 1 NO.	CHECK UNIT	CHECK REQD	CAR (NOS)		ADDITION (NOS)		CYCLE (NOS)	
		UNIT	PROP	BY RULE	PROP.	BY RULE	PROP.	BY RULE	PROP.
RESIDENTIAL	0 - 40	1	12	1	1	10	4	12	12
RESIDENTIAL	40.00 - 80	1	0	1	1	1	1	0	0
RESIDENTIAL	80.00 - 120	1	0	2	0	2	0	0	0
RESIDENTIAL	> 120.00	1	0	3	0	2	0	2	0
VISITOR				1 Visitor	1	1 Visitor	1	1 Visitor	1
TOTAL	REQUIRED				2		15		13
TOTAL	PROPOSED	-	-	-	2	-	15	-	13

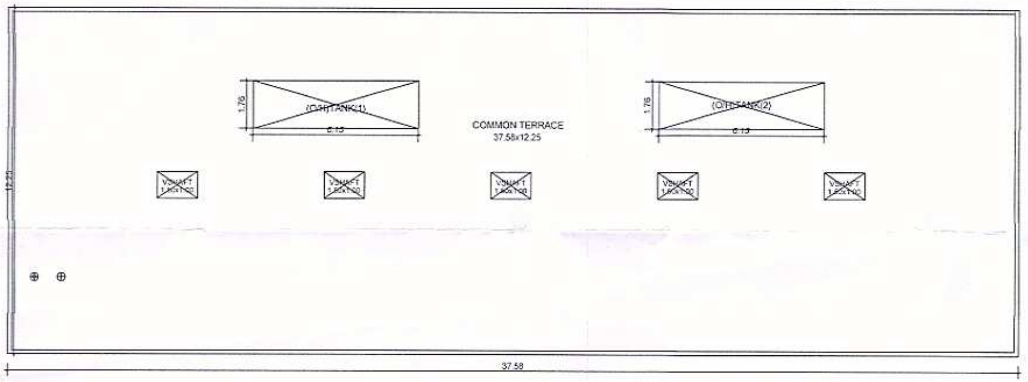

BUILDING WISE FSI STATEMENT

BUILDING	FSI AREA				BALCONY			PASSAGE	STAIR	LIFT	TERRACE	LIFT M/C ROOM	TENE.	TOTAL
	COMM.	RESI.	IND.	SPEC.	PERM	PROP.	EXCESS							FSI AREA
PLOT NO. 37 TO 40 -1 (ROW BUNGALOW)	0.00	452.88	0.00	0.00	67.93	0.00	0.00	0.00	0.00	0.00	0.00	0.00	12	452.88
TOTAL	0.00	452.88	0.00	0.00	67.93	0.00	0.00	0.00	0.00	0.00	0.00	0.00	12	452.88

FLOOR WISE FSI STATEMENT: PLOT NO. 37 TO 40 (ROW BUNGALOW)

FLOORS	FSI AREA				BALCONY			PASSAGE	STAIR		LIFT	TERRACE	LIFT M/C ROOM	TENE.	TOTAL
	COMM.	RESI.	IND.	SPEC.	PERM	PROP.	EXCESS		NORMAL STAIR	FIRE STAIR	FIRE OF FTS				FSI AREA
GROUND FLOOR	0.00	452.88	0.00	0.00	67.93	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	12	452.88
TOTAL	0.00	452.88	0.00	0.00	67.93	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	12	452.88

BALCONY CALCULATIONS: PLOT NO. 37 TO 40 (ROW BUNGALOW)

FLOOR	SIZE	AREA	TOT. AREA
TOTAL	-	-	0.00

TERRACE CALCULATIONS: PLOT NO. 37 TO 40 (ROW BUNGALOW)

FLOOR	SIZE	AREA	TOT. AREA
TOTAL	-	-	0.00

OPENING SCHEDULE: PLOT NO. 37 TO 40 (ROW BUNGALOW)

NAME	WIDTH	HEIGHT	NOS.
D1	0.70	2.10	01
D	0.75	2.10	02
D1	0.75	2.10	23
D	0.90	2.10	02


COVERAGE	AREA
PLOT NO. 37 TO 40 (ROW BUNGALOW)	[illegible]


OPENING SCHEDULE: PLOT NO. 37 TO 40 (ROW BUNGALOW)

NAME	WIDTH	HEIGHT	NOS.
V	0.60	1.50	24
W	0.75	1.50	02
W	1.50	1.50	18
W	1.80	1.50	10

CARPET DETAILS

BUILDING NAME	FLOOR NAME	CARPET NAME	CARPET AREA	ENC BAL AREA	TERRACE AREA	OPEN BAL AREA
PLOT NO. 37 TO 40 (ROW BUNGALOW)	GROUND FLOOR PLAN	CARPET1	35.85	0.00	0.00	0.00
		CARPET10	34.89	0.00	0.00	0.00
		CARPET11	34.89	0.00	0.00	0.00
		CARPET12	36.03	0.00	0.00	0.00
		CARPET2	34.89	0.00	0.00	0.00
		CARPET3	34.89	0.00	0.00	0.00
		CARPET4	34.89	0.00	0.00	0.00
		CARPET5	34.89	0.00	0.00	0.00
		CARPET6	34.89	0.00	0.00	0.00
		CARPET7	34.89	0.00	0.00	0.00
		CARPET8	34.89	0.00	0.00	0.00
		CARPET9	34.89	0.00	0.00	0.00

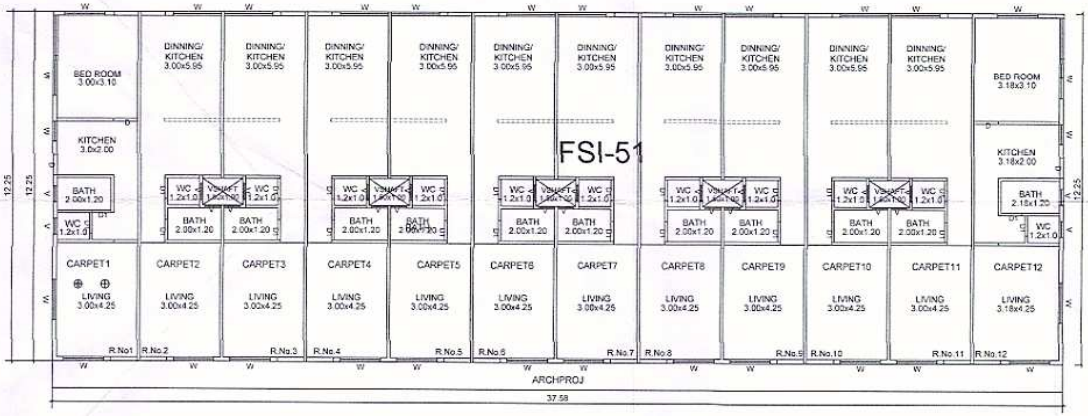

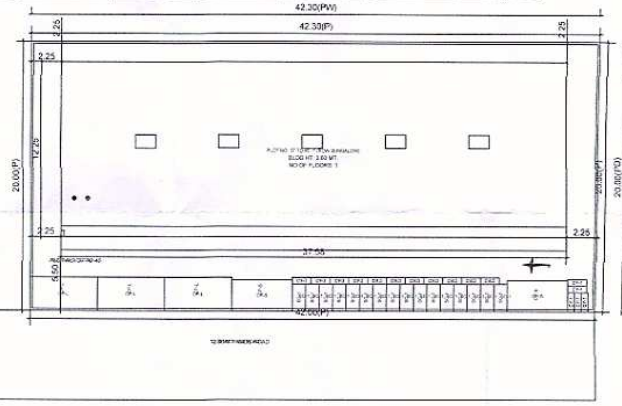

PLOT NO. 37 TO 40 (ROW BUNGALOW)

STAMP OF APPROVAL

SHREENATH DESIGN & ASSOCIATES
ARCHITECTURAL & CIVIL CONSULTANTS
NASHIK

A) AREA STATEMENT	SQ.M.
1. AREA OF PLOT	843.00
2. DEDUCTIONS FOR	
(a) ROAD WIDENING AREA	0.00
(b) PROPOSED D.P. ROAD	0.00
(c) ANY RESERVATION	0.00
(d) FANNING AREA	0.00
TOTAL (a+b+c+d)	0.00
3. GROSS AREA OF PLOT (1-2) :	843.00
4. RECREATIONAL OPEN SPACE	
(a) REQUIRED AREA	0.00
(b) PROPOSED AREA	0.00
5. AMENITY SPACE	
(a) REQUIRED AREA	0.00
(b) PROPOSED AREA	0.00
6. SERVICE ROAD AND HIGHWAY WIDENING	000.00
7. INTERNAL ROAD AREA	000.00
8. NET AREA OF PLOT [3-5(a)] :	843.00
9. BASIC PERMISSIBLE F.S.I. 1.1000	927.30
10. ADDITION OF AREA FOR F.S.I.	
(a) ROAD WIDENING AREA [1.85 X 2(a)]	0.00
(b) DP ROAD AREA [1.85 X 2(b)]	0.00
(c) AMENITY SPACE [2.0 or 1.85 X 5(a)]	0.00
(d) PREMIUM F.S.I. AREA	0.00
(e) TDR AREA	0.00
(f) ADD. F.S.I AREA UNDER CHAPTER VIII	0.00
TOTAL (a+b+c+d+e+f)	0.00
11. TOTAL AREA (9+10) :	927.30
12. MAX. UTILIZATION OF F.S.I. AS PER ROAD WIDTH	2.25
13. PROPOSED BUILT UP AREA	
(a) EXISTING FLOOR AREA	0.00
(b) PROPOSED RESIDENTIAL AREA	452.88
(c) PROPOSED COMMERCIAL AREA	0.00
(d) PROPOSED INDUSTRIAL AREA	0.00
(f) PROPOSED SPECIAL FSI AREA	0.00
(g) EXCESS BALCONY AREA TAKEN IN F.S.I.	0.00
(h) EXCESS TERRACE AREA TAKEN IN F.S.I.	000.00
TOTAL BUILT UP AREA (a to h) (Excluding Area 15.b)	490.46
14. F.S.I. CONSUMED (13/6)	0.5800
15. AREA FOR INCLUSIVE HOUSING, If Any	
(a) REQUIRED (20% of 9)	000.00
(b) PROPOSED	000.00

B) BALCONY STATEMENT	
(a) PERMISSIBLE BALCONY AREA	67.93
(b) PROPOSED BALCONY AREA	0.00
(c) EXCESS BALCONY AREA (TOTAL)	0.00

C) PARKING STATEMENT	CAR-L	CAR-S	SCOOTER	CYCLE
(a) PARKING REQUIRED BY RULE	2	2	13	13
(b) PARKING PROVIDED	3	2	16	16

CERTIFICATE OF AREA

CERTIFIED THAT THE PLOT UNDER REFERENCE WAS SURVEYED BY ME ON _____ AND THE DIMENSIONS OF SIDES ETC. OF PLOT STATED ON PLAN ARE AS MEASURED ON SITE AND THE AREA SO WORKED OUT TALLIES WITH THE AREA STATED IN DOCUMENT OF OWNERSHIP / T.P.SCHEME RECORD / LAND RECORD DEPT. / CITY SURVEYED RECORDS.

Sign of Architect/Licensed Eng./Supervisor

OWNER's DECLARATION

I/We understand hereby conform that I/We would abide by plans sanctioned by Nashik Municipal Corporation. I/We would execute person so as to ensure the quality and safety as the work site.

Owner's Sign.

LEGEND

PLOT BOUNDARY SHOWN BLACK	
PROPOSED WORK SHOWN RED	
DRAINAGE LINE SHOWN RED DOTTED	
WATERLINE SHOWN BLACK DOTTED	
EXISTING TO BE RETAINED BLACK	
DEMOLISHION SHOWN HATCHED YELLOW	

PLOT NO. 37 TO 40

Document Name	Area

OWNER'S NAME: MR. NARAYAN LABHU SARODE — OWNER'S SIGN:

PROJECT: BUILDING PERMISSION

PLOT NO: 37 TO 40 — CTS NO: —
FINAL PLOT NO: — SURVEY NO.: 55/1/B
VILLAGE: CHUNCHLE SHIWAR NASHIK

ARCHITECT/ENGINEER/SURVEYOR'S NAME: — SIGN:

VINAYAK K. PATIL
FLAT NO. B-14 , SHARMILA APPT. OLD GANGAPUR NAKA NASHIK - 422005

JOB NO.	DRG.NO.	SCALE	DRAWN BY	CHECKED BY
		1:100		

INWARD NO. : NMC/TPD/Pathardi/BP/1467/2018
KEY NO. :
DATE 11-05-2018 SHEET NO. 1 / 1

THIS IS A SYSTEM GENERATED DRAWING (APPROVED COPY) AS PER THE SOFT COPY SUBMITTED BY THE ARCHITECT/ LICENSE ENGINEER