
Carpet Area Table

Building Name	Floor Name	Carpet name	Tenement No	Carpet Area	Enclosed Balcony Area	Normal Balcony Area	Mezzanine Area	Total Carpet Area
ALTAIR CIVIL LINES	TYPICAL 2ND 3RD 5TH 6TH 7TH 9TH 10TH 11TH 12TH 14TH 15TH 16TH 18TH FLOOR	601;701;901;100 1;1101;12B01;14 01;1501;1601;18 01;1901;2001;22 01	13	327,62	0,00	0,00	0,00	327,62
ALTAIR CIVIL LINES	TYPICAL 2ND 3RD 5TH 6TH 7TH 9TH 10TH 11TH 12TH 14TH 15TH 16TH 18TH FLOOR	602;702;902;100 2;1102;12B02;14 02;1502;1602;18 02;1902;2002;22 02	13	265,61	0,00	0,00	0,00	265,61
ALTAIR CIVIL LINES	TYPICAL 4TH 8TH 13TH 17TH	801;12A01;1701; 2101	4	327,61	0,00	0,00	0,00	327,61
ALTAIR CIVIL LINES	TYPICAL 4TH 8TH 13TH 17TH	802;12A02;1702; 2102	4	265,60	0,00	0,00	0,00	265,60
ALTAIR CIVIL LINES	24TH FLOOR PENTHOUSE	2800	1	554,91	0,00	0,00	0,00	554,91
ALTAIR CIVIL LINES	25TH FLOOR PENTHOUSE	2900	1	554,82	0,00	0,00	0,00	554,82
ALTAIR CIVIL LINES	26TH FLOOR PENTHOUSE	3000	1	469,36	0,00	0,00	0,00	469,36
ALTAIR CIVIL LINES	27TH FLOOR PENTHOUSE	3100	1	469,35	0,00	0,00	0,00	469,35
ALTAIR CIVIL LINES	19TH FLOOR DUPLEX LEVEL 01;20TH FLOOR DUPLEX LEVEL 2	2401	1	475,05	0,00	0,00	0,00	475,05
ALTAIR CIVIL LINES	19TH FLOOR DUPLEX LEVEL 01;20TH FLOOR DUPLEX LEVEL 2	2301	1	588,34	0,00	0,00	0,00	588,34
ALTAIR CIVIL LINES	22ND FLOOR DUPLEX LEVEL 2;21ST FLOOR DUPLEX LEVEL 01	2501	1	588,34	0,00	0,00	0,00	588,34
ALTAIR CIVIL LINES	22ND FLOOR DUPLEX LEVEL 2;21ST FLOOR DUPLEX LEVEL 01	2601	1	475,05	0,00	0,00	0,00	475,05

BUILT UP AREA CALCULATION
FOR TYPICAL 2ND 3RD 5TH 6TH 7TH 9TH 10TH 11TH 12TH 14TH 15TH 16TH 18TH FLOOR ALTAIR CIVIL LINES


AREA NAME	LENGTH	WIDTH	Area(Sq.M)
BLOCK	37.74	29.96	922.92
BLOCK AREA TOTAL =922.92Sq.M			
LiftWell42	-	-	7.52
LiftWell41	-	-	6.78
LiftWell40	-	-	4.36
LiftWell39	-	-	4.36
LiftWell38	-	-	4.31
Duct67	-	-	1.28
Duct66	-	-	1.18
Duct65	-	-	0.66
Duct64	-	-	0.66
Duct63	-	-	3.87
Duct62	-	-	2.49
Duct61	-	-	5.19
TOTAL Deduction =42.66Sq.M			
Net BuiltUp Area =880.26 Sq.M			

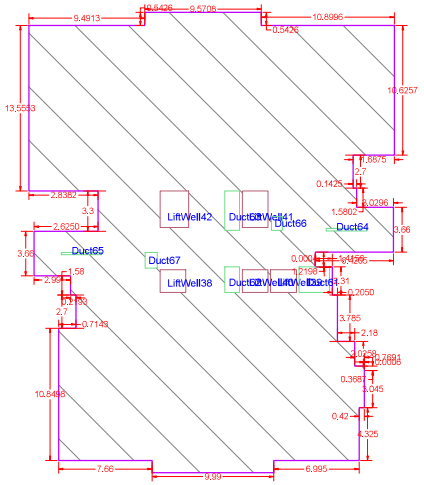


BUILT-UP AREA CALCULATION TYPICAL 2ND 3RD 5TH 6TH 7TH 9TH 10TH 11TH 12TH 14TH 15TH 16TH 18TH FLOOR ALTAIR CIVIL LINES

BUILT UP AREA CALCULATION
FOR TYPICAL 4TH 8TH 13TH 17TH ALTAIR CIVIL LINES


AREA NAME	LENGTH	WIDTH	Area(Sq.M)
BLOCK	37.74	29.96	959.75
BLOCK AREA TOTAL =959.75Sq.M			
Refuse3	-	-	43.13
LiftWell37	-	-	7.52
LiftWell36	-	-	6.78
LiftWell35	-	-	4.36
LiftWell34	-	-	4.36
LiftWell33	-	-	4.31
Duct60	-	-	1.28
Duct59	-	-	1.18
Duct58	-	-	0.66
Duct57	-	-	0.66
Duct56	-	-	3.87
Duct55	-	-	2.49
TOTAL Deduction =80.60Sq.M			
Net BuiltUp Area =879.15 Sq.M			

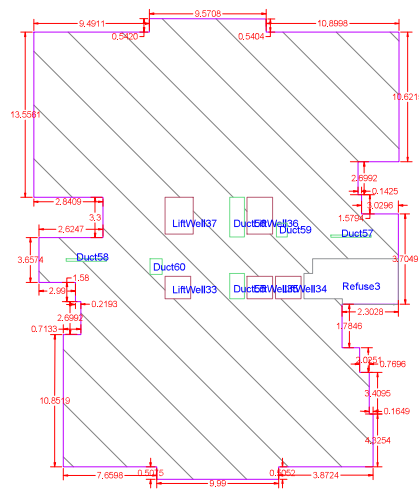

BUILT-UP AREA CALCULATION TYPICAL 4TH 8TH 13TH 17TH ALTAIR CIVIL LINES

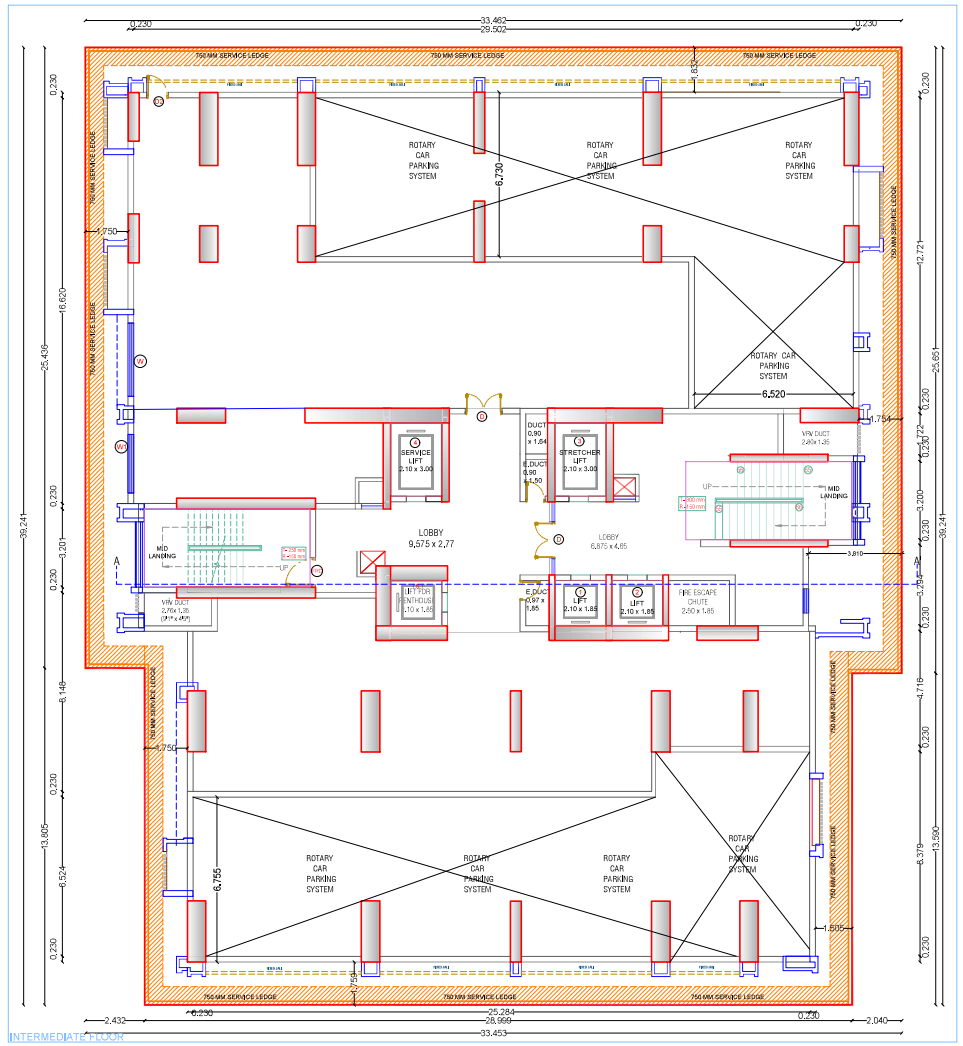

INTERMEDIATE LEVEL FLOOR PLAN
SCALE 1:100

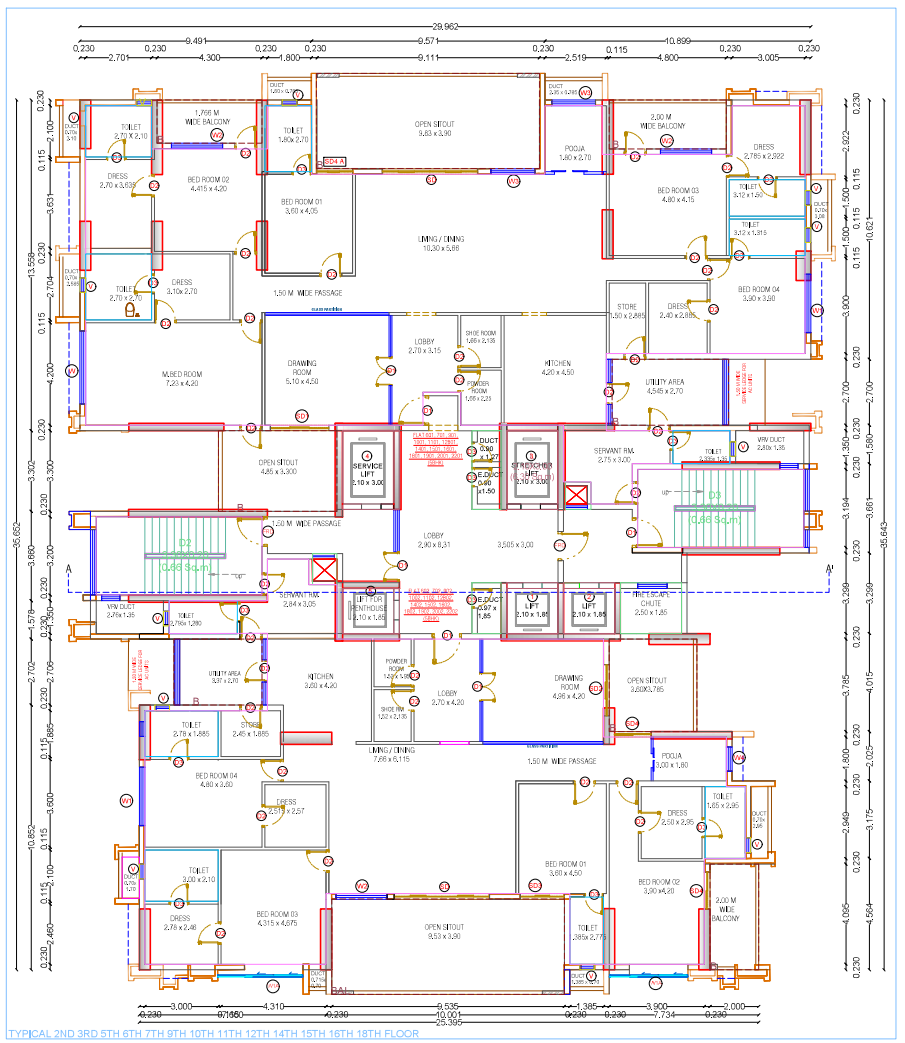
29.962
0.230
2.701
9.491
4.300
1.800
0.571
0.111
2.519
0.115
10.899
4.600
3.005
TOILET 2.70 X 2.10
1,200 M WIDE BALCONY
OPEN SHOWER 1.40 x 1.40
OPEN SHOWER 1.40 x 1.40
OPEN SHOWER 1.40 x 1.40