
## Carpet Area Table

| Building Name | Floor Name | Carpet name | Tenement No | Carpet Area | Enclosed Balcony Area | Normal Balcony Area | Mezzanine Area | Total Carpet Area |
|---|---|---|---|---|---|---|---|---|
| ALTAIR CIVIL LINES | TYPICAL 2ND 3RD 5TH 6TH 7TH 9TH 10TH 11TH 12TH 14TH 15TH 16TH 18TH FLOOR | 601;701;901;100 1;1101;12B01;14 01;1501;1601;18 01;1901;2001;22 01 | 13 | 327,62 | 0,00 | 0,00 | 0,00 | 327,62 |
| ALTAIR CIVIL LINES | TYPICAL 2ND 3RD 5TH 6TH 7TH 9TH 10TH 11TH 12TH 14TH 15TH 16TH 18TH FLOOR | 602;702;902;100 2;1102;12B02;14 02;1502;1602;18 02;1902;2002;22 02 | 13 | 265,61 | 0,00 | 0,00 | 0,00 | 265,61 |
| ALTAIR CIVIL LINES | TYPICAL 4TH 8TH 13TH 17TH | 801;12A01;1701; 2101 | 4 | 327,61 | 0,00 | 0,00 | 0,00 | 327,61 |
| ALTAIR CIVIL LINES | TYPICAL 4TH 8TH 13TH 17TH | 802;12A02;1702; 2102 | 4 | 265,60 | 0,00 | 0,00 | 0,00 | 265,60 |
| ALTAIR CIVIL LINES | 24TH FLOOR PENTHOUSE | 2800 | 1 | 554,91 | 0,00 | 0,00 | 0,00 | 554,91 |
| ALTAIR CIVIL LINES | 25TH FLOOR PENTHOUSE | 2900 | 1 | 554,82 | 0,00 | 0,00 | 0,00 | 554,82 |
| ALTAIR CIVIL LINES | 26TH FLOOR PENTHOUSE | 3000 | 1 | 469,36 | 0,00 | 0,00 | 0,00 | 469,36 |
| ALTAIR CIVIL LINES | 27TH FLOOR PENTHOUSE | 3100 | 1 | 469,35 | 0,00 | 0,00 | 0,00 | 469,35 |
| ALTAIR CIVIL LINES | 19TH FLOOR DUPLEX LEVEL 01;20TH FLOOR DUPLEX LEVEL 2 | 2401 | 1 | 475,05 | 0,00 | 0,00 | 0,00 | 475,05 |
| ALTAIR CIVIL LINES | 19TH FLOOR DUPLEX LEVEL 01;20TH FLOOR DUPLEX LEVEL 2 | 2301 | 1 | 588,34 | 0,00 | 0,00 | 0,00 | 588,34 |
| ALTAIR CIVIL LINES | 22ND FLOOR DUPLEX LEVEL 2;21ST FLOOR DUPLEX LEVEL 01 | 2501 | 1 | 588,34 | 0,00 | 0,00 | 0,00 | 588,34 |
| ALTAIR CIVIL LINES | 22ND FLOOR DUPLEX LEVEL 2;21ST FLOOR DUPLEX LEVEL 01 | 2601 | 1 | 475,05 | 0,00 | 0,00 | 0,00 | 475,05 |

**BUILT UP AREA CALCULATION**
**FOR TYPICAL 2ND 3RD 5TH 6TH 7TH 9TH 10TH 11TH 12TH 14TH 15TH 16TH 18TH FLOOR ALTAIR CIVIL LINES**


| AREA NAME | LENGTH | WIDTH | Area(Sq.M) |
|---|---|---|---|
| BLOCK | 37.74 | 29.96 | 922.92 |
| BLOCK AREA TOTAL =922.92Sq.M | | | |
| LiftWell42 | - | - | 7.52 |
| LiftWell41 | - | - | 6.78 |
| LiftWell40 | - | - | 4.36 |
| LiftWell39 | - | - | 4.36 |
| LiftWell38 | - | - | 4.31 |
| Duct67 | - | - | 1.28 |
| Duct66 | - | - | 1.18 |
| Duct65 | - | - | 0.66 |
| Duct64 | - | - | 0.66 |
| Duct63 | - | - | 3.87 |
| Duct62 | - | - | 2.49 |
| Duct61 | - | - | 5.19 |
| TOTAL Deduction =42.66Sq.M | | | |
| Net BuiltUp Area =880.26 Sq.M | | | |

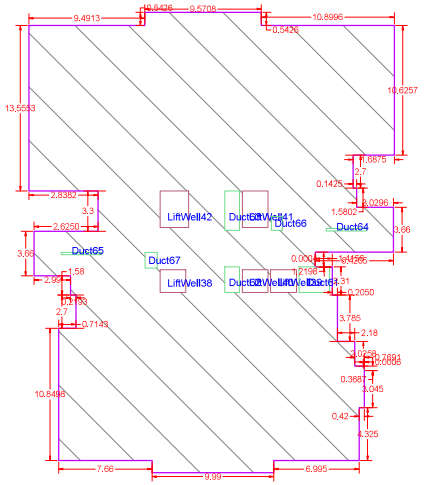



BUILT-UP AREA CALCULATION TYPICAL 2ND 3RD 5TH 6TH 7TH 9TH 10TH 11TH 12TH 14TH 15TH 16TH 18TH FLOOR ALTAIR CIVIL LINES

**BUILT UP AREA CALCULATION**
**FOR TYPICAL 4TH 8TH 13TH 17TH ALTAIR CIVIL LINES**


| AREA NAME | LENGTH | WIDTH | Area(Sq.M) |
|---|---|---|---|
| BLOCK | 37.74 | 29.96 | 959.75 |
| BLOCK AREA TOTAL =959.75Sq.M | | | |
| Refuse3 | - | - | 43.13 |
| LiftWell37 | - | - | 7.52 |
| LiftWell36 | - | - | 6.78 |
| LiftWell35 | - | - | 4.36 |
| LiftWell34 | - | - | 4.36 |
| LiftWell33 | - | - | 4.31 |
| Duct60 | - | - | 1.28 |
| Duct59 | - | - | 1.18 |
| Duct58 | - | - | 0.66 |
| Duct57 | - | - | 0.66 |
| Duct56 | - | - | 3.87 |
| Duct55 | - | - | 2.49 |
| TOTAL Deduction =80.60Sq.M | | | |
| Net BuiltUp Area =879.15 Sq.M | | | |

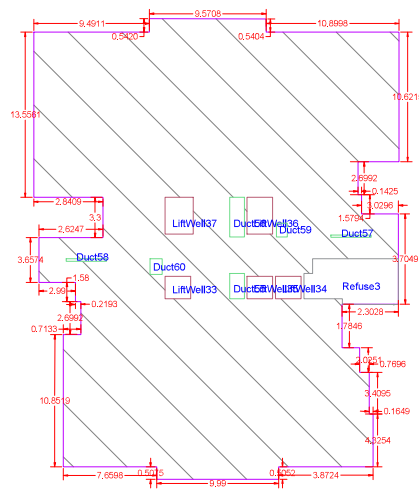


BUILT-UP AREA CALCULATION TYPICAL 4TH 8TH 13TH 17TH ALTAIR CIVIL LINES

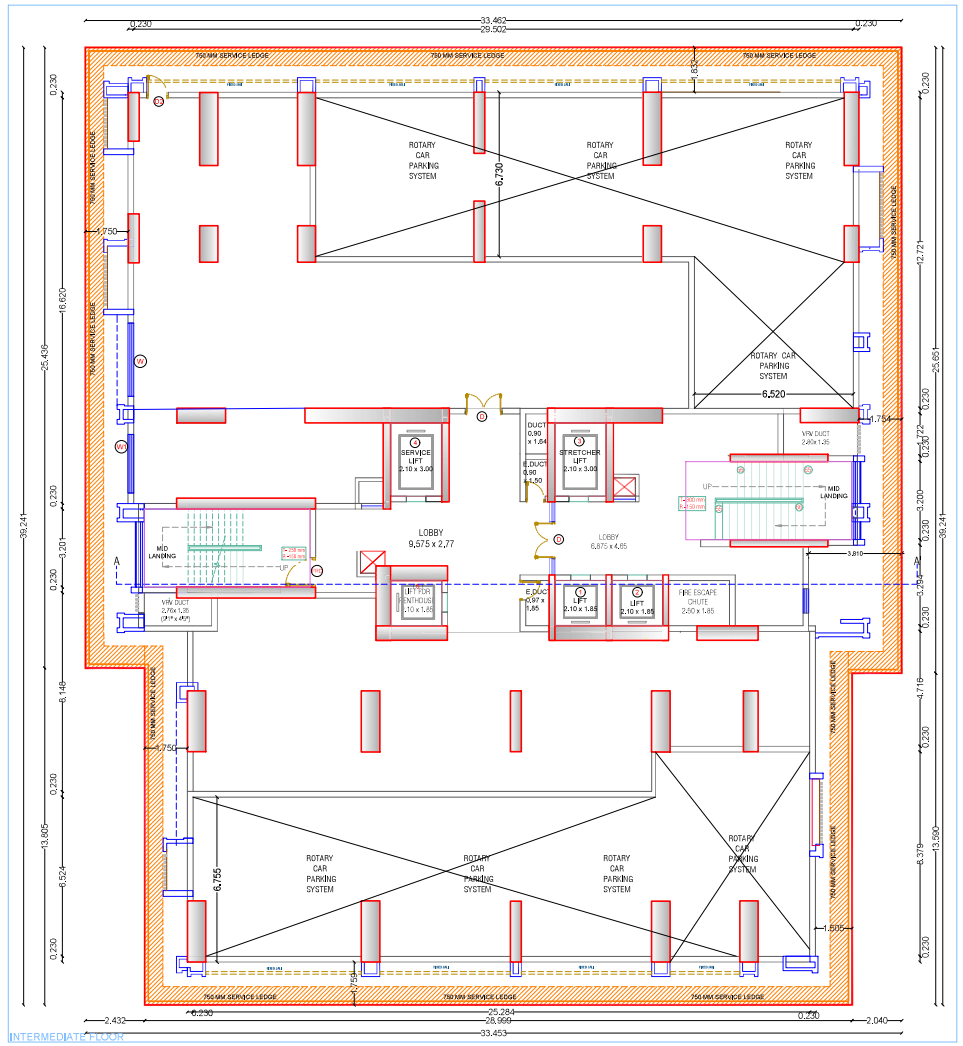


INTERMEDIATE LEVEL FLOOR PLAN
SCALE 1:100

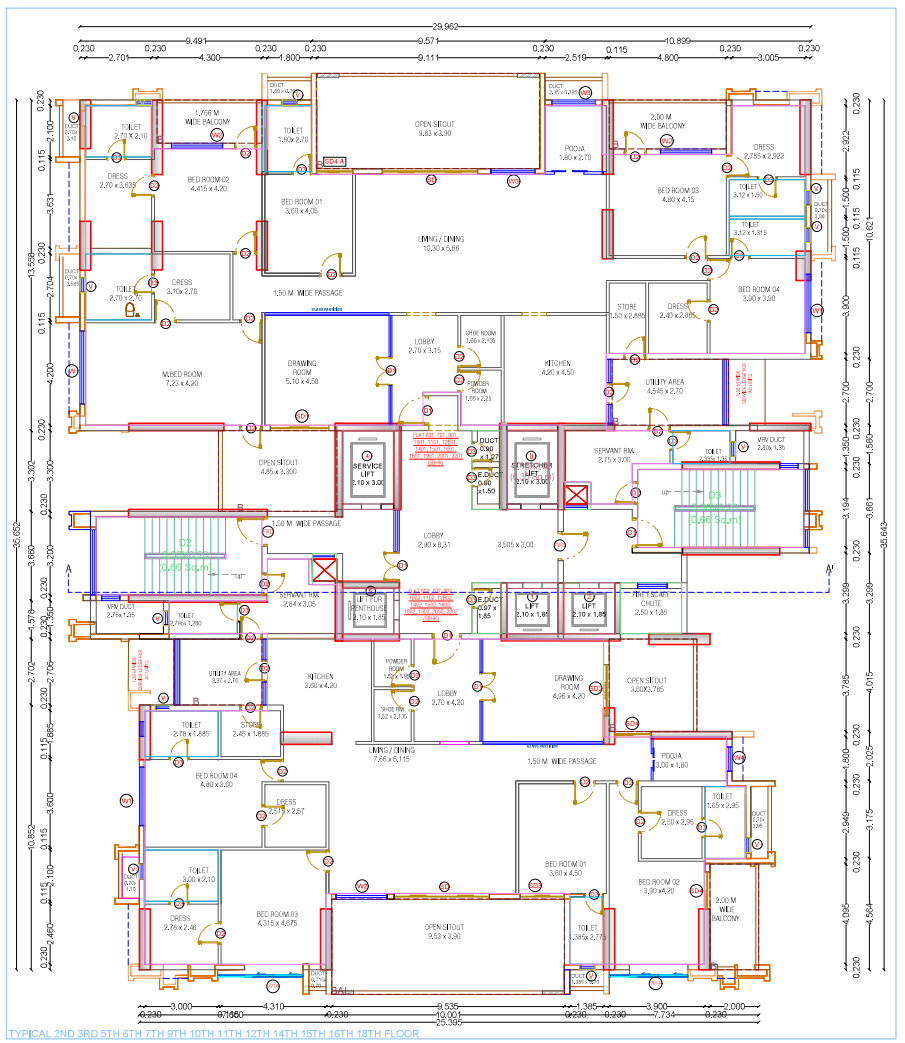
29.962
0.230
2.701
9.491
4.300
1.800
0.571
0.111
2.519
0.115
10.899
4.600
3.005
TOILET 2.70 X 2.10
1,200 M WIDE BALCONY
OPEN SHOWER 1.40 x 1.40
OPEN SHOWER 1.40 x 1.40
OPEN SHOWER 1.40 x 1.40